


Exedra - Pocket door order form

Details to be sent to order a pocket door mechanism made to measure

MacMURRAY
PACIFIC

415-552-5500 • orders@macmurraypacific.com



SALICE

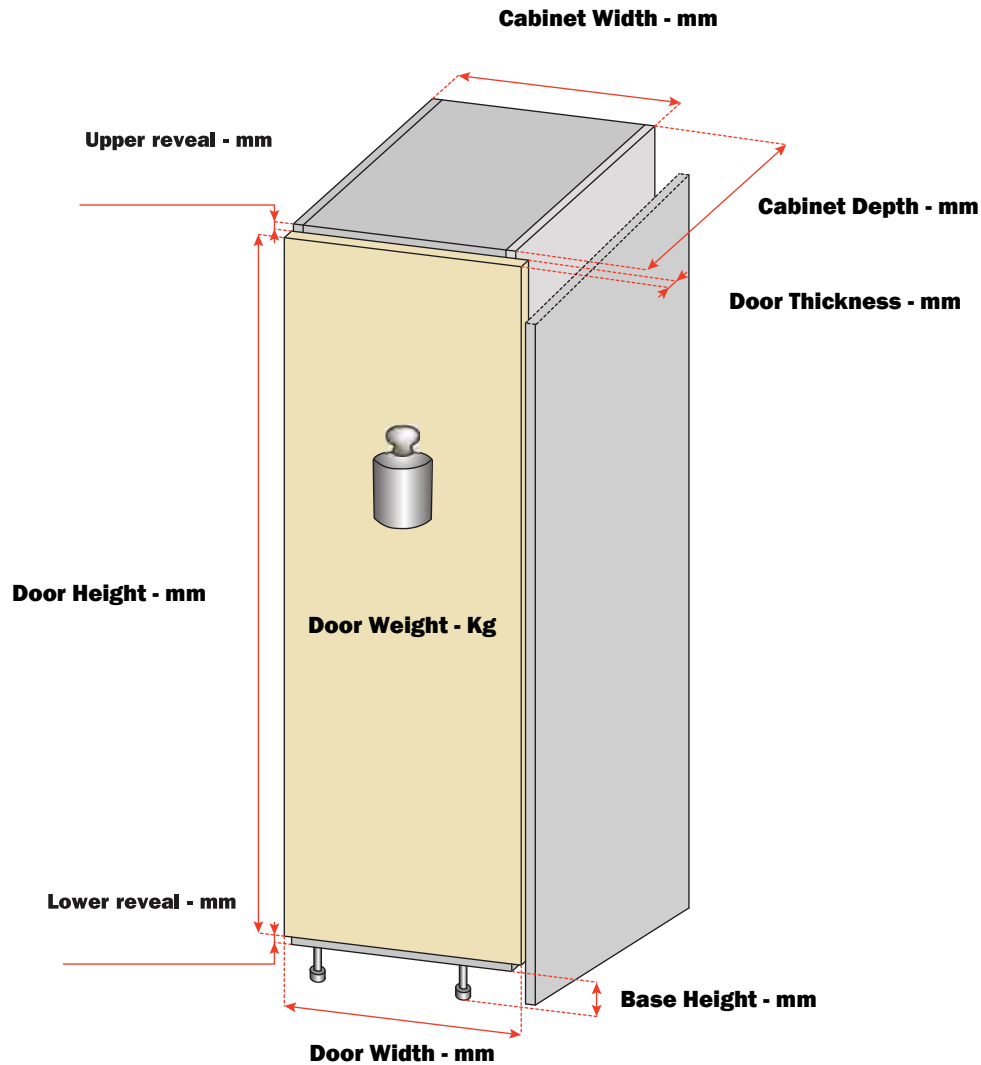

Assembly Instructions



Opening direction:




Qty:


Right

Left


Cover panel connector kit Type A




Type B




Type C




Soft close kit for door




Push to open kit for door



Front cover kit



Roller kit for aluminum door or 5-piece wood door



Contact name

Company

Date

Project

Distributor


E-mail

Mechanism characteristics

- Aluminum profiles: 6060T5 alloy, silver anodized.
- Components made of plastic, steel and zinc alloy.
- Mounting with clips to facilitate extraction of the mechanism in case of maintenance.
- Quick coupling hinges.

Door features

- Maximum weight for each door : up to 88 lbs (40 Kg).
(with 5 hinges allowed and only with a 700 mm max door width).
- Thickness: - min. 3/4" (19 mm) - max. 1-3/16" (30 mm).
- Width: - min. 14-9/16" (370 mm) - max. 35-7/16" (900 mm).
- Height: - min. 53-1/2" (1359 mm) - max. 110-1/4" (2800 mm).
- Door height adjustment: +4/-1 mm.
- Door side adjustment: ± 2 mm.
- Door front adjustment: ± 4 mm.
- Cam-assisted door extraction movement.
- Standard projection of the door in open position: 107 mm (4-3/16") when allowed.
- Recommended space below door 5 mm (3/16")
- Material: a) wood or derivatives;
b) metal and glass frame.

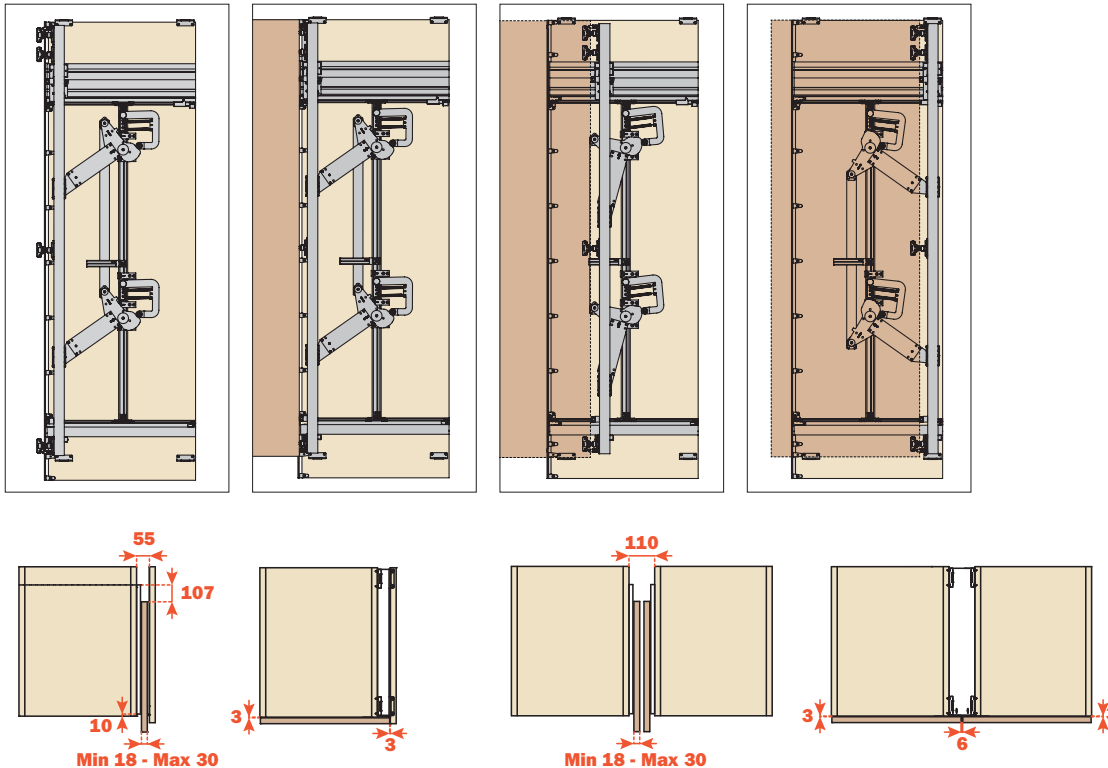**How to order the mechanism**

- 1) Complete all the requested values in the section "cabinet dimensions" of the order form.
- 2) Choose the opening direction. Select the box "Right" or "Left".
- 3) Optional accessories:
 - Cover panel connector kit
 - Roller kit for aluminum door or 5-piece wood door
 - Smove soft kit for door
 - Front cover kit: choose the color
 - Push to open kit for door

Space required for the panel connector kit:

A minimum 6 mm above and 28 mm below the cabinet

B & C minimum 16 mm above and below the cabinet

Send the completed "order form" page to Salice America or to a Salice distributor.

