



## NEOLOOP LED LIGHTS




N1 SIDE



Beam 110°

Uses: Highlight millwork, outline logos &amp; more

N2 TOP



Beam 145°

Uses: Undercounter accents, soffits or toe kick lighting

Specifications	Side-Emitting	Top-Emitting
Wattage	3W/ Ft.	3W/ Ft.
Lumens	100/ Ft.	200/ Ft.
Efficacy (lm/W)	33.3	66.7
Diode Life	50,000 hrs.	50,000 hrs.
Bend Radius/Axis	4" Horizontal	4" Vertical

Side Emitting, N1

	Description	List/rl
L-N1-12V3WM-30K-5M	N1, Warm Wt, 16.4'	\$ 393
L-N1-12V3WM-35K-5M	N1, Neutral Wt, 16.4'	393
L-N1-12V3WM-48K-5M	N1, Cool Wt, 16.4'	393

Top Emitting, N2

	Description	List/rl
L-N2-12V3WM-30K-5M	N2, Warm Wt, 16.4'	420
L-N2-12V3WM-35K-5M	N2, Neutral Wt, 16.4'	420
L-N2-12V3WM-48K-5M	N2, Cool Wt, 16.4'	420

TRANSFORMER - 60W

Max run of Neoloop from a single 60W Transformer is 20 ft. Mounting Block and Power Cord are included with each Transformer. Black. Optional Dimmer.

Code	Description	List/ea
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93
L-N1-12PKT-2M	N1 Starter Cord*	32.58
L-N2-12PKT-2M	N2 Starter Cord*	28.14

\*Each roll comes with 2 starter cords but more will most likely be required

60W HARDWIRE LED POWER SUPPLY

Dims with Wall Switch




Code	Description	List/ea
DC-E60D-CON	Dimmable Hardwire Power Supply 60W	\$ 211.51


NEOLOOP SIDE OR TOP EMITTING, 12VDC, 3W/FT.

Shatterproof and watertight, Neoloop gives off a smooth continuous beam of light, without dark spots. This durable, flexible LED is cuttable and linkable. Easy to install by pressing into a routed groove, or surface mount with U-clips. Dimmable with optional dimmers. Built in diffuser seals the beam.

- Flexible silicone construction with built-in diffuser
- Dimmable
- Stocked in: Warm (3000K), Neutral (3500K) and Cool (4800K)
- 16.4' Rolls, cuttable every 1"
- Linkable with link cords and back-to-back connectors
- 79" starter cords molded on each end for easy installation
- Groove for recess mounting or surface mount with U-clips
- 50,000 hours diode life
- Max run 20' per 60W power supply
- Input Voltage: 12VDC

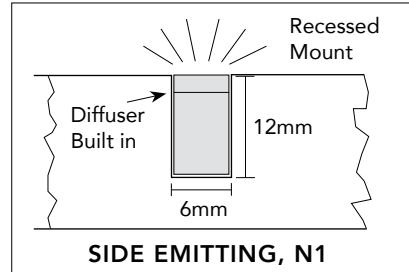

Press into a groove for recess mounting or surface mount with U-Clips.

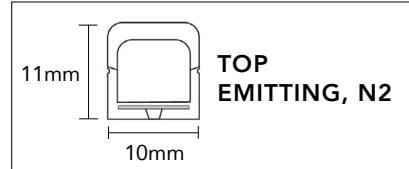OPTIONAL ACCESSORIES

See more on pages 1008-1014

Side Emitting N1	Description	List
L-N1-LNK25	N1 Link Cord, 10"	\$ 39.13
L-N1-LNK60	N1 Link Cord, 24"	40.04
L-N1-LNK120	N1 Link Cord, 48"	45.54
L-N1-LNK180	N1 Link Cord, 72"	48.44
L-N1-BTB	Back to Back connector	15.01
L-N1-ENDCAP	End Caps	.74
L-N1-UCLP	U-Clip for surface mount	15.36

Top Emitting N2

L-N2-LNK25	N2 Link Cord, 10"	\$ 37.04
L-N2-LNK60	N2 Link Cord, 24"	37.90
L-N2-LNK120	N2 Link Cord, 48"	40.20
L-N2-LNK180	N2 Link Cord, 72"	42.79
L-N2-BTB	Back to Back connector	14.56
L-N2-ENDCAP	End Caps	1.44
L-N2-UCLP	U-Clip for surface mount	18.80

## FLEXTAPE LED LIGHTS

FLEXTAPE LED LIGHTS

- Avg. rated life: 50,000 hrs
- 1.5 Watts / foot
- Sold by 4' and 20' rolls (L x 3/8" W x 1/16" H)
- Cuttable every 2" (49mm)
- Avail. in Warm, Neutral & Cool White

- Low heat
- Strong 3M adhesive backing
- Dimmer available
- Linkable
- 115° beam angle


This flexible LED tape's low profile allows use in many discreet locations. Max continuous run is 20' (6m). It has an adhesive backing for easy mounting. Sold per roll.

Applications: Cove lighting, Back lighting, Accent and Edge lighting, Toekick, Soffit  
May be used with Infinex Aluminum Extrusions.

REQUIRED PARTSFLEXTAPE LED

Roll Size 20' or 4'.  
Cuttable every 2".

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-FLXTPE-WROLL	20' Warm Wht (2700K)	\$ 369
LED-FLXTPE-NROLL	20' Neutral Wht (3500K)	437
LED-FLXTPE-CROLL	20' Cool Wht (4800K)	376

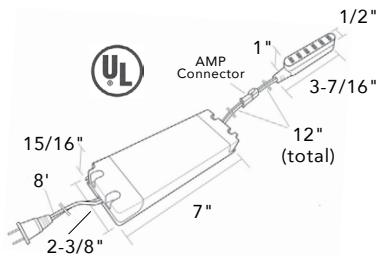
TRANSFORMER - 60W

Maximum run of FlexTape from a single Transformer is 40 ft. Mounting Block and Power Cord are included with each Transformer. Black.

<u>Code</u>	<u>Description</u>	<u>List</u>
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93

STARTER CORD

Connects each FlexTape segment to mounting block of transformer.  
Length: 79".



<u>Code</u>	<u>Description</u>	<u>List</u>
LED-TPEPKT-2M	Straight Feed	\$ 12.10
LED-TPEPKT-2M-TEE	Split Feed	21.69

OPTIONAL ACCESSORIES

See more on pages 1008-1014

<u>Code</u>	<u>Description</u>	<u>List</u>
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
LED-TPEPKT-2M-TEE	Split Feed Starter Cord	21.69
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, Wh	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Blk	57.98
MALEAMP	Amp Connector	13.18
LED-TPELNK-TEE	Tee Connector	7.17
LED-TPELNK-CON90	Right Angle Connector	6.39
LED-TPELNK-5	Jumper Cord, 2"	6.67
LED-TPELNK-15	Jumper Cord, 6"	7.19
LED-TPELNK-25	Jumper Cord, 10"	7.93
LED-TPELNK-60	Jumper Cord, 24"	9.15
LED-TPELNK-120	Jumper Cord, 48"	9.49
LED-TPELNK-180	Jumper Cord, 72"	10.42
LED-LINKD-25	Extension Cord, 10"	7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDS-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01
XFL72-SC	72" Sat Alum Extrusion	46.87



## FLEXIBLE TAPE LED LIGHTS

EQUILINE TAPE LED 3W LIGHTING


The low profile and flexibility of the Equiline Tape LED makes it the perfect light for displays, signs and perimeter lighting. Sold by the roll and has adhesive backing for effortless installation. 3500K Warm White. Max continuous run is 16.4' (5m). May be used with Infinex Aluminum Extrusions.

- 16.4' Rolls / Max 20' per 60W power supply
- 3W per foot, cuttable every 1"
- 3500K Warm White, Beam angle: 115°
- 12VDC input voltage
- 25,000 hour diode life


REQUIRED PARTSEQUILINE TAPE LED LIGHTS

Roll Size 16.4'.

Cuttable every 1".



Code	Description	List/rl
TPELED-35HER	Equiline Tape LED, 3W/ft, 3500K Warm White	\$ 270.60

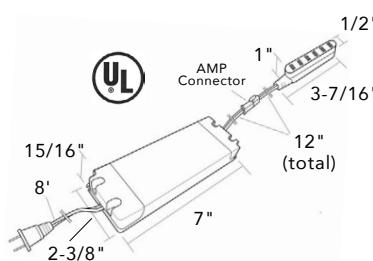TRANSFORMER - 60W

Maximum run of Tape from a single Transformer is 20 ft. Mounting Block and Power Cord are included with each Transformer. Black.

Code	Description	List
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93

STARTER CORD

Connects each FlexTape segment to mounting block of transformer. Length: 79".



Code	Description	List
LED-TPEPKT-2M	Straight Feed	\$ 12.10
LED-TPEPKT-2M-TEE	Split Feed	21.69


OPTIONAL ACCESSORIES

See more on pages 1008-1014

Code	Description	List
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
LED-TPEPKT-2M-TEE	Split Feed Starter Cord	21.69
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, Wh	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Blk	57.98
L-XSBTB-1	Back to Back Connector	4.69
MALEAMP	Amp Connector	13.18
LED-TPELNK-TEE	Tee Connector	7.17
LED-TPELNK-CON90	Right Angle Connector	6.39
LED-TPELNK-5	Jumper Cord, 2"	6.67
LED-TPELNK-15	Jumper Cord, 6"	7.19
LED-TPELNK-25	Jumper Cord, 10"	7.93
LED-TPELNK-60	Jumper Cord, 24"	9.15
LED-TPELNK-120	Jumper Cord, 48"	9.49
LED-TPELNK-180	Jumper Cord, 72"	10.42
LED-LINKD-25	Extension Cord, 10"	7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDs-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01
XFL72-SC	72" Sat Alum Extrusion	46.87


10

## FLEXTAPE COB LED LIGHTS

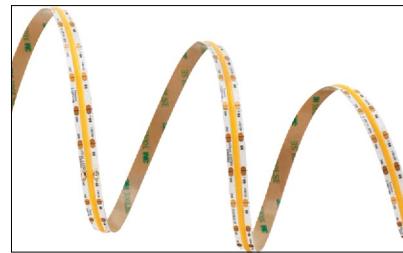FlexTape COB LED Lighting

Tresco Flextape COB (Chip on Board) LED lighting. Continuous coating, high density LED lighting without dark spots - no covers or filters needed! May use with Infinex Aluminum channel.

- Avg. rated diode life: 50,000 hrs
- 4.4 Watts per foot
- 13' rolls, Cuttable every 11/16" (18mm)
- Strong 3M adhesive backing
- Available in Warm, Neutral and Cool White
- Beam angle: 115°
- Max continuous run 13'

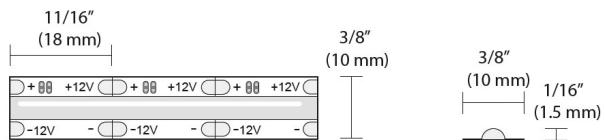


Continuous Coating -  
No Dark Spots!

REQUIRED PARTSCOB FLEXTAPE LED

Roll Size: 13', Cuttable every 11/16"

Code	Description	List/rl
L-FLXCOB12-30RV-1	Warm White, 13'	\$ 324
L-FLXCOB12-35RV-1	Neutral White, 13'	324
L-FLXCOB12-48RV-1	Cool White, 13'	324

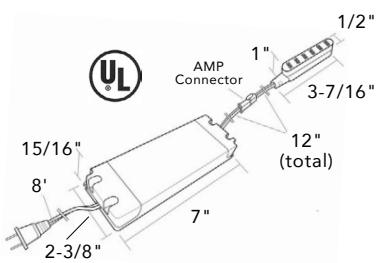TRANSFORMER - 60W

Maximum run of FlexTape from a single Transformer is 13 ft. Mounting Block and Power Cord are included with each Transformer. Black.

Code	Description	List
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93

STARTER CORD

Connects each FlexTape segment to mounting block of transformer. Length: 79".



Code	Description	List
LED-TPEPKT-2M	Straight Feed	\$ 12.10
LED-TPEPKT-2M-TEE	Split Feed	21.69

OPTIONAL ACCESSORIES




See more on pages 1008-1014

Code	Description	List
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
LED-TPEPKT-2M-TEE	Split Feed Starter Cord	21.69
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, Wh	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Blk	57.98
L-XSBTB-1	Back to Back Connector	4.69
MALEAMP	Amp Connector	13.18
LED-TPELNK-TEE	Tee Connector	7.17
LED-TPELNK-CON90	Right Angle Connector	6.39
LED-TPELNK-5	Jumper Cord, 2"	6.67
LED-TPELNK-15	Jumper Cord, 6"	7.19
LED-TPELNK-25	Jumper Cord, 10"	7.93
LED-TPELNK-60	Jumper Cord, 24"	9.15
LED-TPELNK-120	Jumper Cord, 48"	9.49
LED-TPELNK-180	Jumper Cord, 72"	10.42
LED-LINKD-25	Extension Cord, 10"	7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDS-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01
XFL72-SC	72" Sat Alum Extrusion	46.87

**LED PUCK LIGHTS****3W POWER POCKET LED LIGHTS**

The Power Pockit LED offers effective flood and task lighting in a low profile, energy-efficient package. Provides rated life of 50,000 hours. Can be used within interior cabinets, under cabinets and store displays - providing a crisp, uniform lighting. Has a frosted diffuser which eliminates glare and reflections.

- Lowest profile - 1/4" depth when recessing
- 1/2" overall thickness (surface mount)
- 120° light spread
- Warm or cool white avail.
- 79" cord, dimmer available
- Surface mount ring included
- 2-1/4" hole for recessing


**REQUIRED PARTS****3W LED POCKET LIGHTS**

Code	Description	List/ea
POC-3LEDSFR-WWH	Warm Wht 3000K, White	\$ 101.70
POC-3LEDSFR-WBL	Warm Wht 3000K, Black	101.70
POC-3LEDSFR-WNI	Warm Wht 3000K, Nickel	101.67
POC-3LEDSFR-CBL	Cool Wht 5000K, Black	101.68
POC-3LEDSFR-CNI	Cool Wht 5000K, Nickel	101.67

Takes any ELT Transformer 6W to 60W.

**60W TRANSFORMER: DC-SLELT60-CON \$ 121.93**

3W - 20 lights max. Includes mounting block and 8' power cord. For an extra 6-snap mounting block order TRANS-MNT-BL. Black.

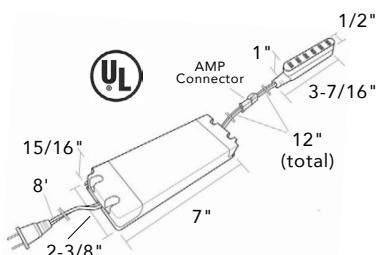**OPTIONAL ACCESSORIES**

See more on pages 1008-1014

10


Code	Description	List
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
TRANS-MNT-BL	6-Snap Mtg Block	13.71
LED-LINKD-25	Extension Cord, 10"	7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, White	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Black	57.98
MALEAMP	Amp Connector	13.18
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDs-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01

## LED PUCK LIGHTS

3W EQUILINE LED PUCK LIGHTS

With recessed or surface mount ability, Equiline LED pucks are perfect for use in a wide range of applications. They feature a slim profile and a 79' starter cord, with an unattached AMP connector for easy wire routing. 25,000 hour life.

- 1/2" depth when recessing
- 1/2" overall thickness (surface mount)
- Surface mount ring sold separately
- 100° light spread
- Warm or cool white avail.
- 79" cord, dimmer available
- 2-1/4" hole for recessing

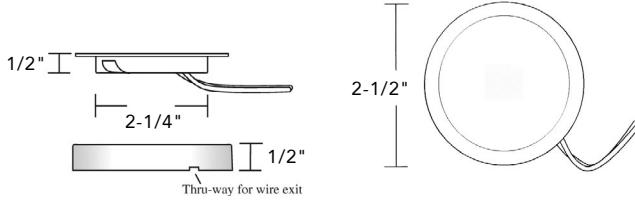
REQUIRED PARTS3W EQUILINE LED PUCK LIGHTS

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
POC-3EQFR-CBL	Cool Wht, 5000K, Black	\$ 41.10
POC-3EQFR-CNI	Cool Wht, 5000K, Nickel	41.10
POC-3EQFR-WBL	Warm Wht, 3000K, Black	41.18
POC-3EQFR-WNI	Warm Wht, 3000K, Nickel	41.18

Takes any ELT Transformer 6W to 60W.

60W TRANSFORMER: DC-SLELT60-CON \$ 121.93

3W - 20 lights max. Includes mounting block and 8' power cord. For an extra 6-snap mounting block order TRANS-MNT-BL). Black.

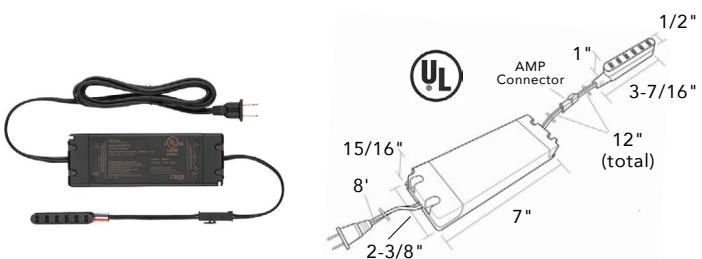OPTIONAL ACCESSORIES

See more on pages 1008-1014

<u>Code</u>	<u>Description</u>	<u>List</u>
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
TRANS-MNT-BL	6-Snap Mtg Block	13.71
LED-LINKD-25	Extension Cord, 10"	7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, White	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Black	57.98
MALEAMP	Amp Connector	13.18
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDS-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01




## LED STICK LIGHTS

FINELINE 2.0 LED STICK LIGHTS

4.4W/ ft.

330 Lumens  
per ft.

Luniform output - no "dots"

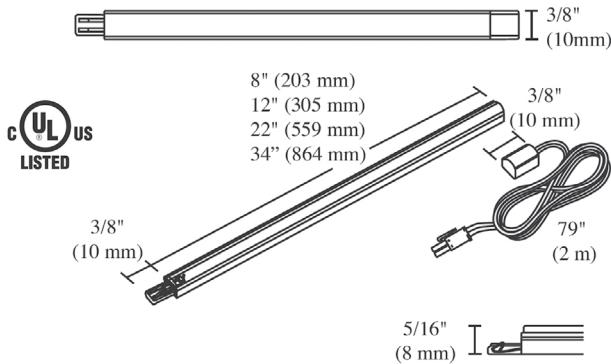

Pencil thin FineLine 2.0 stick lighting. Low-profile design features a milk diffuser for even illumination. Optional manual or remote-control dimmers available. Aluminum & Nickel finish.

Available in 4 lengths, and in warm or cool temperatures. Max continuous run of 12 ft. to prevent voltage drop. Max 13 ft. per 60W power supply. 79" starter cord, AMP connector and mounting U-clips are included with each light.

12V DC, 50,000 Diode life. Surface or Recess mounting.




Linkable (seamless back to back or link cord) up to 12' continuous run.

REQUIRED PARTSFineLine 2.0 LED Stick Lights

Warm White = 3000K, Cool White = 5000K

Code	Description	List
L-STKH08-WNI-1	8" Sgl Stk, Warm Wht	\$ 70.21
L-STKH08-CNI-1	8" Sgl Stk, Cool Wht	70.21
L-STKH012-WNI-1	12" Sgl Stk, Warm Wht	83.41
L-STKH012-CNI-1	12" Sgl Stk, Cool Wht	83.37
L-STKH022-WNI-1	22" Sgl Stk, Warm Wht	139.20
L-STKH022-CNI-1	22" Sgl Stk, Cool Wht	139.14
L-STKH034-WNI-1	34" Sgl Stk, Warm Wht	182.76
L-STKH034-CNI-1	34" Sgl Stk, Cool Wht	182.76

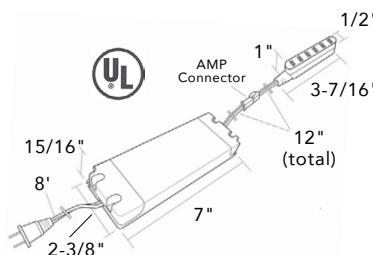TRANSFORMER - 60W

Max 13 ft per 60W power supply. Mounting Block and Power Cord are included with each Transformer. Black.


Code	Description	List
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93

OPTIONAL ACCESSORIES


See more on pages 1008-1014

10


Code	Description	List
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84
TRANS-MNT-BL	6-Snap Mounting Block	21.69
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97
LED-DIMCON-WH	Manual Rotary Dimmer, White	58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Black	57.98
MALEAMP	Amp Connector	13.18
LED-OVLTD-NI	Dimmer Control, Nickel	51.53
LED-OVLDs-NI	Door Sensor, Nickel	49.94
L-RSMOT-NI	Motion Sensor, Nickel	55.01
LED-STKDIM-TD4	Inline Touch Dimmer	46.55
LED-STKLNK-5	2" Stick Linking Cord	5.61
LED-STKLNK-15	6" Stick Linking Cord	6.24
LED-STKLNK-25	10" Stick Linking Cord	6.54
LED-STKLNK-60	24" Stick Linking Cord	7.95
LED-STKLNK-120	48" Stick Linking Cord	10.77
LED-STKLNK-180	72" Stick Linking Cord	12.15

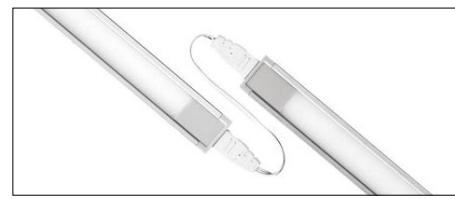**EUROLINX**


EUL - Eurolinx linkable lighting

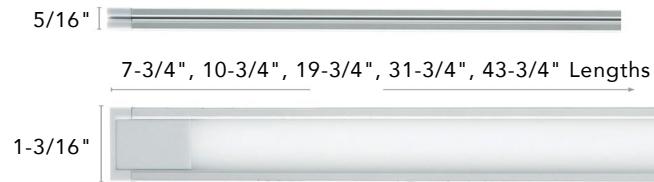

- Available in four lengths
- Linkable back-to-back up to 10' (3 m) continuous run
- Mounting clips with integrated magnets allow for metal surface mounting as well as traditional screw mount
- Optional in-line Gradual Touch Dimmer
- Sleek, contemporary European design

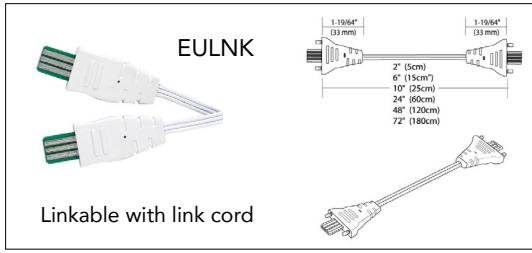

Linkable with link cord



Mounting clips with integrated magnets



Optional inline gradual touch dimmer



Back-to-Back Link

**REQUIRED PARTS**

Eurolinx Series 12VDC. Each light contains: 79" cord, U-Clips and a back to back connector.

Warm White = 3000K, Cool White = 5000K


Code	Description	List/ea
EUL3W-197CAL	7.75", 3W, Cool White	\$ 102.34
EUL3W-197WAL	7.75", 3W, Warm White	102.28
EUL4W-273CAL	10.75", 7W, Cool White	114.28
EUL4W-273WAL	10.75", 7W, Warm White	114.28
EUL7W-502CAL	19.75", 7W, Cool White	131.81
EUL7W-502WAL	19.75", 7W, Warm White	131.86
EUL11W-806CAL	31.75", 11W, Cool White	164.67
EUL11W-806WAL	31.75", 11W, Warm White	164.71
EUL15W-1111CAL	43.75", 15W Cool White	197.43
EUL15W-1111WAL	43.75", 15W Warm White	197.43

**60W TRANSFORMER: DC-SLELT60-CON \$ 121.93**


Includes mounting block and power cord. For an extra 6-snap mounting block order TRANS-MNT-BL. Maximum 15' per 60W power supply.

**Two Beam Spreads!!!**

## Powered Left Side



## Powered Right Side

**OPTIONAL ACCESSORIES**

Code	Description	List/ea
EULNK-15-WH	6" Link Cord, white	\$ 12.19
EULNK-25-WH	10" Link Cord, white	13.09
EULNK-60-WH	24" Link Cord, white	14.95
EULNK-120-WH	48" Link Cord, white	17.75
EULNK-180-WH	72" Link Cord, white	21.32
EULNK-BTB-GY	Back-to-back Link, gray	6.83
EUL-GTD	27W gradual inline touch dimmer	35.30
EUL-UCLP	U-Clip pack (2 clips)	9.87


**LED POWER SUPPLIES - TRANSFORMERS**

18W, 60W

12V DC, equipped with mounting block that allows for 6 easy snap-in connections. Black in color.

**60W Power Supply**



Supplied with 6' 110/240V cord and plug.

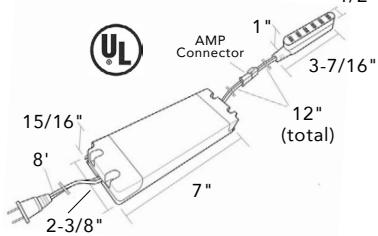**DC-SLELT60-CON**

Code	Description	List
DC-SLELT60-CON	60W 12VDC Transformer	\$ 121.93

**LED WALL MOUNT POWER SUPPLIES**

12V DC Equiline Wall Mount Power Supplies. 6W includes 3 Snap Mounting Block, 15W includes a 6 Snap Mounting Block.

**DC-ELT6WP-CON****DC-ELT15WP-CON**

Code	Description	List
DC-ELT6WP-CON	6W 12VDC Wall Mount w/ 3 Snap Block	\$ 48.87
DC-ELT15WP-CON	15W 12VDC Wall Mount w/ 6 Snap Mounting Block	47.64

**MOUNTING BLOCK**


6 Snap Mounting Block. For Tresco DC Power Supplies only, 60W max. Add an extra mounting block to utilize the full capacity of the power supply. Can be hardwired on DC-E60D-CON dimmable Hardwire Power Supply.

Code	Description	List/ea
TRANS-MNT-BL	6-Snap Mounting Block	\$ 13.71


## LED ACCESSORIES

### HARDWIRE 12V DC POWER SUPPLY

Dimmable with std CL Wall Dimmers

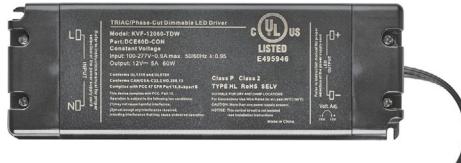

DC-E60D-CON

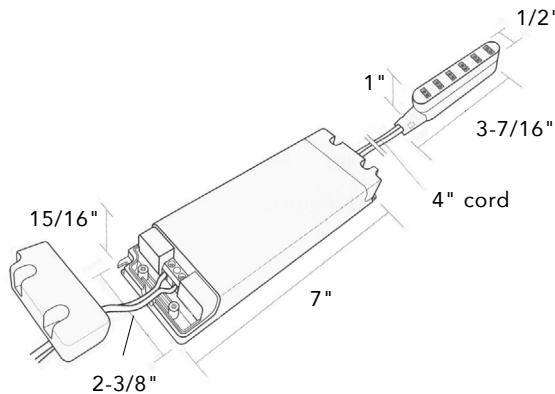

- 60W 12V DC dimmable electronic transformer
- UL listed
- Class 2 w/ short circuit and automatic reset
- Continuous smooth dimming by standard LED/CF Wall dimmers
- Works with all Tresco 12V DC dimmable LED fixtures
- Under 1" profile
- Wire directly into unit
- One 6-snap mounting block included

Code	Description	List/ea
DC-E60D-CON	Dimmable Hardwire 60W Power Supply	\$ 211.51

### LUTRON DIVA C-L DIMMER

Works with above LED Power Supply

- Matches existing switches
- Large paddle switch and a small slider
- Slide control to adjust lights, paddle switch returns light to your favorite level
- Power failure memory
- Standard RFI suppression
- Rated at 120 VAC, 60 Hz
- Use only with dimmable bulbs

Wall Dimmer  
(plate not included)



DVCL-153PH-WH List \$ 74.82



### ROUND SWITCH - 12V





Round Rocker Switch  
available in Black or  
White. 3/4" hole required  
for switch. 79" cord from  
switch to plug.

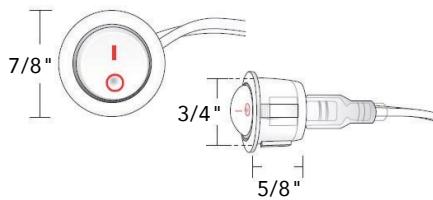

Code	Description	List/ea
RDSW-2M-WH	Round Switch, White	\$ 24.76
RDSW-2M-BL	Round Switch, Black	25.84

### MANUAL ROTARY DIMMER

Provides On/Off power and  
dims lights from 1-100%.  
Available in Black or White.

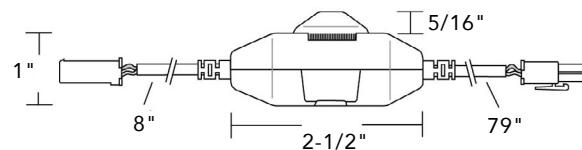


Code	Description	List
LED-DIMCON-WH	Manual Rotary Dimmer, White	\$ 58.07
LED-DIMCON-BL	Manual Rotary Dimmer, Black	57.98

**REMOTE CONTROL LED DIMMERS - 12V**

Remote Control LED Dimmers feature radio-frequency, remote-control dimming to adjust lights from anywhere in the room - up to 30 feet. Provides On/Off power and dims lights from 100% to 1%.



The Dedicated Remote Control independently controls one specific dimmer in a room with other dimmers. The Universal Remote Control controls multiple dimmers in a room. 12V DC, 96W.

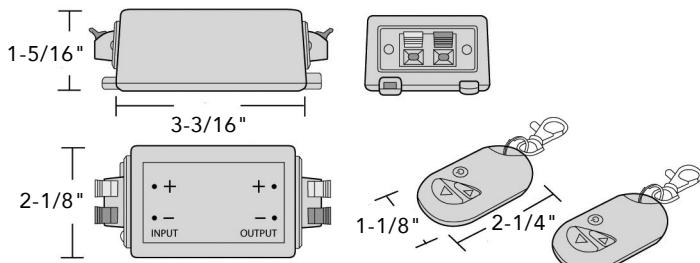

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
LED-DIMRMT-12V8A	LED Dedicated Remote Control Dimmer	\$ 102.83
LED-DIMRMT-12V8A-U	LED Universal Remote Control Dimmer	89.97

**LED ACCESSORIES****AMP CONNECTOR**

Male AMP Connector for LED Light Fixture wiring.



10 each per pack, sold per pack.

<u>Code</u>	<u>Description</u>	<u>List/pk</u>
MALEAMP	AMP Connector	\$ 13.18


**EXTENSION CORD**

10

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-LINKD-25	Extension Cord, 10"	\$ 7.79
LED-LINKD-60	Extension Cord, 24"	8.71
LED-LINKD-120	Extension Cord, 48"	10.60
LED-LINKD-180	Extension Cord, 72"	13.16

**STARTER CORDS FOR FLEXIBLE LIGHTING**

79" Starter Lead for Flexible Lighting. Connects each segment to mounting block of transformer. 5/8" hole required. Straight feed and split feed.

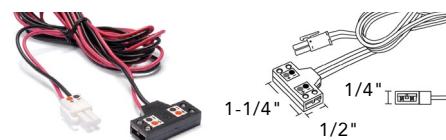**Straight Feed****Split Feed**

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-TPEPKT-2M	Straight Feed	\$ 12.10
LED-TPEPKT-2M-TEE	Split Feed	21.69

## LED ACCESSORIES

### JUMPER CORD

Link Flextape splices together. Positive and negative contacts on Flextape and FlexConnects should match up, to maintain proper polarity.



<u>Code</u>	<u>Description</u>	<u>List</u>
LED-TPELNK-5	Flextape Link Cord, 2"	\$ 6.67
LED-TPELNK-15	Flextape Link Cord, 6"	7.19
LED-TPELNK-25	Flextape Link Cord, 10"	7.93
LED-TPELNK-60	Flextape Link Cord, 24"	9.15
LED-TPELNK-120	Flextape Link Cord, 48"	9.49
LED-TPELNK-180	Flextape Link Cord, 72"	10.42

### ROUND DIMMER/SENSORS

10 Recessed or surface mounted lighting controllers for 12VDC. Can be placed between mounting block and power supply (sold separately) to control all the lights on one system, or between light and mounting block for isolated control of each light. Uses power supplies; DC-ELT12, 18, or 60. Max Wattage: 60W. 17/32" diameter, 2-3/8" Length. Cable input: 79", output: 6". Surface mount plate packaged with each controller. Nickel finish.



LED-OVLT-D-NI

Touch ON/OFF and 0-100% dimming control. Hold finger down for dimming.



L-RSMOT-NI

Turns on when human motion is detected. Sensor range 0 - 118", 120° viewing. Time on: 30 sec. if no motion.




LED-OVLDS-NI

Door Open: Light on; Door Closed: Light off. Sensor range: 0 - 3-1/8".

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-OVLT-D-NI	Dimmer Control	\$ 51.53
L-RSMOT-NI	Motion Sensor	55.01
LED-OVLDS-NI	Door Sensor	49.94

### TEE CONNECTOR

For connecting FlexTape splices at a T-junction.



<u>Code</u>	<u>Description</u>	<u>List</u>
LED-TPELNK-TEE	Tee Connector	\$ 7.17

### RIGHT ANGLE CONNECTOR

For connecting FlexTape splices at a 90 degree corner.



<u>Code</u>	<u>Description</u>	<u>List</u>
LED-TPELNK-CON90	Right Angle Connector	\$ 6.39

### BACK TO BACK CONNECTOR

For Tape Lighting




10mm

<u>Code</u>	<u>Description</u>	<u>List</u>
L-XSBTB-1	Back to Back Connector for tape lighting, 24VDC	\$ 4.69

**FREEDIM SERIES DECO WALL DIMMER**

- Single and 2-zone wireless dimmers
- 65' range from dimmer to receiver
- Controls all Tresco dimmable low voltage lights
- Control same set of lights from multiple Deco Wall Dimmers
- Can be programmed to multiple receivers for more lighting control

Light Almond  
finish, 2 ZoneWhite finish,  
Single ZoneBattery  
compartment

Code  
WLD-1WAL-WH  
WLD-2WAL-LA

Description  
Wall Dimmer, Single Zone  
Wall Dimmer, 2 Zone

Finish  
White  
Lt. Almond

List/ea  
\$167.99  
184.03

**FREEDIM SERIES MICRO DIMMER**

- Single zone wireless dimmer
- Easy to replace, long life lithium battery
- 65' range from dimmer to receiver
- Controls all Tresco dimmable low voltage lights
- Built-in magnet; mounts to metal surfaces
- Screw mounts to wood surfaces
- Available in Nickel and Black finishes

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
WLD-1RND-NI	Micro Dimmer, Nickel 5/8" Ht, 1-1/2" diameter	\$ 50.45
WLD-1RND-BL	Micro Dimmer, Black 5/8" Ht, 1-1/2" diameter	50.45

**FREEDIM SERIES  
SERIES 3 ZONE REMOTES**


- Independent control of 3 lighting zones (respectively) from a single remote
- Set brightness levels of all the zones to a desired level then save as a 'scene'
- 65 ft. range of control from remote to receiver
- Controls all Tresco dimmable low voltage lights



10

Must have at least one receiver (WLD-1REC next page) to operate. Remote is 5-15/16" (50mm) x 1-9/16" (39mm).

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
WLD-3RMT-BL	3 Zone Remote, Black finish	\$ 76.13

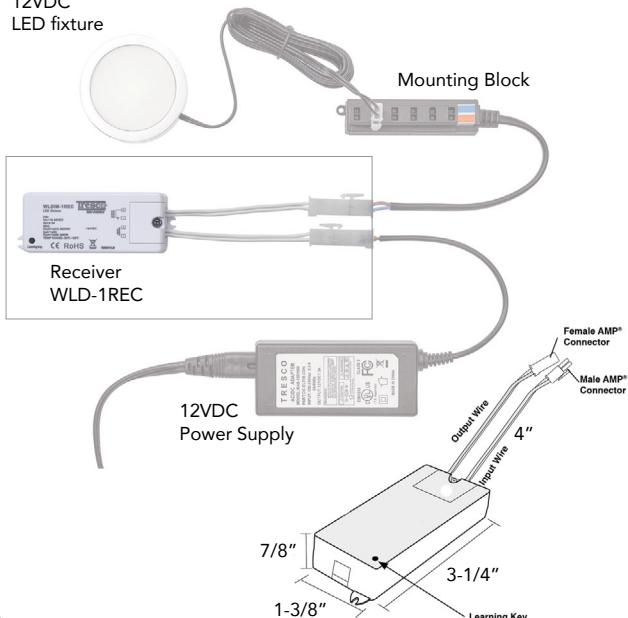FREEDIM  
WIRELESS CONTROL**FREEDIM SERIES UNIVERSAL RECEIVER**12VDC  
LED fixture


10

- 60W capacity
- Power failure memory
- Multiple receivers can be used on a single power supply or within a room to achieve multiple zones of control
- Compatible with all FreeDim Series controllers
- A single receiver can be programmed to up to 8 different FreeDim Series remotes/dimmers
- One WLD-1REC needed for each transformer

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
WLD-1REC	Universal Receiver	\$ 103.85

**DUAL USB CHARGING STATION**

USB charging station that ties into the same system as your 12V Tresco lighting system!

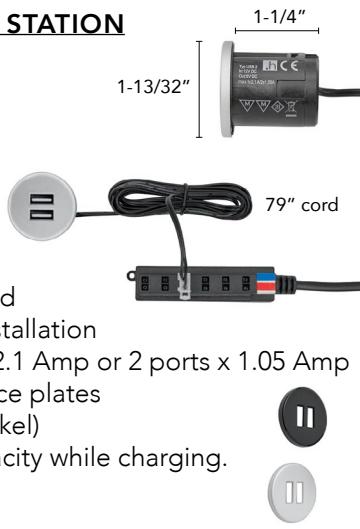

- 79" starter cord attached
- Low profile recessed installation
- Max load cap: 1 port x 2.1 Amp or 2 ports x 1.05 Amp
- Two interchangeable face plates included (Black and Nickel)
- Draws 10W at max capacity while charging. Has auto shut-off

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
HUSB2-BLNI	Dual USB Charging Station	\$ 44.84

**LED ACCESSORIES****INFINEX ALUMINUM EXTRUSIONS**

Route a channel in wood  
7/16" x 3/4" width and  
pressure fit extrusion in place.

Flush Aluminum Extrusion with no end caps - meant for channels that go the entire width or height of the case-work. Can be used with Flextape and Equiline Tape LED lighting.

- Comes with milk diffuser (unattached)
- Uses standard starter lead (LED-TPEPKT-2M)
- 72" (can be cut to size) x 3/4" width x 7/16" height

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
XFL72-SC	Flush Aluminum Extrusion, 72" Satin Clear w/ Milk Diffuser	\$ 46.87

**12V CLASS 2 WIRE**

White, 50' rolls


Need to go through drywall or another permanently enclosed structure with your wires to connect Tresco lights? Use this Class 2 wire to stay within National Electric Code guidelines.



<u>Code</u>	<u>Description</u>	<u>List/rl</u>
16CL2-WH50	50' roll 16 AWG 12V Class 2 Wire	\$ 106.57

**FINELINE TOUCH DIMMER**

For FineLine Stick LEDs




4-Step Dimmer Sensor (low, medium, high, off). Max Load 27W. Controls up to 11 feet of FineLine Lights. Attaches directly or remotely via link cord to the Fineline Lights.

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-STKDIM-TD4	Inline Touch Dimmer	\$ 46.55

**FINELINE LINK CORDS**

For FineLine Stick LEDs

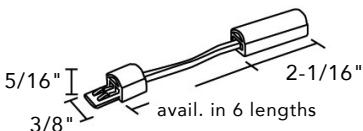

12VDC Stick Linking Cord for use with Tresco Fineline lights. Fineline lights can be mounted end-to-end or with these optional link cords. Available in six lengths. Hole size (if needed): 7/16 in.

<u>Code</u>	<u>Description</u>	<u>List</u>
LED-STKLNK-5	2" Fineline Linking Cord	\$ 5.61
LED-STKLNK-15	6" Fineline Linking Cord	6.24
LED-STKLNK-60	24" Fineline Linking Cord	7.95
LED-STKLNK-120	48" Fineline Linking Cord	10.77
LED-STKLNK-180	72" Fineline Linking Cord	12.15

**LED ACCESSORIES****NEOLOOP ACCESSORIES FOR N1 & N2**

For Neoloop Side &amp; Top Emitting Flexible LED Lights

**DIY Link Cords**

L-N1-LNK, L-N2-LNK


Splice together pieces of Neoloop tape.

**Back-To-Back Connectors**

L-N1-BTB, L-N2-BTB

**End Caps**

L-N1-ENDCAP, L-N2-ENDCAP

**U-Clip for Surface Mounting**

L-N1-UCLP, L-N2-UCLP

10 clips per bag.  
Sold per bag.

**Starter Cords**

L-N1-12PKT-2M, L-N2-12PKT-2M

**Side Emitting N1**

	<u>Description</u>	<u>List</u>
L-N1-LNK25	N1 Link Cord, 10"	\$ 39.13
L-N1-LNK60	N1 Link Cord, 24"	40.04
L-N1-LNK120	N1 Link Cord, 48"	45.54
L-N1-LNK180	N1 Link Cord, 72"	48.44
L-N1-BTB	Back to Back connector	15.01
L-N1-ENDCAP	End Caps	.74
L-N1-UCLP	U-Clip for surface mount	15.36

**Top Emitting N2**

	<u>Description</u>	<u>List</u>
L-N2-LNK25	N2 Link Cord, 10"	\$ 37.04
L-N2-LNK60	N2 Link Cord, 24"	37.90
L-N2-LNK120	N2 Link Cord, 48"	40.20
L-N2-LNK180	N2 Link Cord, 72"	42.79
L-N2-BTB	Back to Back connector	14.56
L-N2-ENDCAP	End Caps	1.44
L-N2-UCLP	U-Clip for surface mount	18.80

**TAPE LIGHTING****BLAZE 12V TAPE LIGHTING - 2.93 watts per foot**

Featuring over 250 lumens per foot, BLAZE 12V LED Tape Lighting excels as either task or ambient lighting. See next page for Aluminum Channels/Covers and other options.



- 16.4' Spools, Max length per run 20'
- 2700K or 4200K Color temp
- 90+ CRI: Excellent color rendering
- UL Listed field cuttable every inch
- Fully dimmable with Switchex Driver/Dimmer
- 3M™ adhesive backing

<u>Code</u>	<u>Description</u>	<u>List/roll</u>
BLBSC2-27	16.4' Tape Lights, 2700K (warm)	\$ 280
BLBSC2-42	16.4' Tape Lights, 4200K (cool)	280

**SWITCHEX DRIVER AND DIMMER SWITCH**

Combines an LED dimmer switch and LED power supply into a single integrated unit.

Three interchangeable face plate colors are included: glossy white, glossy light almond and glossy brown (trim plate not included).



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
DI-12V-SE-60W	Switchex 60W Driver & Dimmer Switch, 12V DC	\$ 329.38

**ELEMENTAL LED****TRADITIONAL POWER SUPPLY FOR BLAZE LEDS****Plug-In Adapters 12W / 24W / 60W**

12V Portable, Plug-In Power Supplies. White Finish.



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
DI-0927	12W Adapter. 2.35" x 1.75" x 1.4"	\$ 42.46
DI-0911	24W Adapter. 3.8" x 1.75" x 1.4"	59.14
DI-0913	60W Adapter. 4.7" x 2" x 1.25"	97.06

**DC Plug Extension Cable**


Extend the distance between any two LED products that have standard 1/4" DC plug. 39". White.



<u>Code</u>	<u>List/ea</u>
DI-0708	\$ 10.65

**ELEMENTAL LED****ACCESSORIES****ALUMINUM CHANNELS FOR BLAZE LEDS****Chromapath® Aluminum Channels, 48" Slim Design**

Aluminum Channels protect and provide light diffusion for LED tape lights. They provide a rigid, dustproof housing that can be mounted on virtually any flat surface. Can be custom cut, as well as mounted end to end to any total length. 48" Lengths.



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
DI-CPCHA-SL48	Alum. Channel, 48" Slim	\$ 31.90

**Chromapath® Aluminum Channel Covers, 48"**

Use with Aluminum Channels to protect and provide multiple levels of light diffusion for indoor LED tape lights. Choose clear or frosted:

**Clear Cover:** protects with no visible color shift or change in delivered lumens.

**Frosted Cover:** protects and slightly softens light. Note there is an average warm shift in Kelvin of 35K and an average 28% decrease in delivered lumens.



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
DI-CPCHC-CL48	Cover, 48", Clear	\$ 10.62
DI-CPCHC-FR48	Cover, 48", Frosted	12.49

**Chromapath® Aluminum Channel End Caps**

Essential for providing a seal on CHROMAPATH Channels. A set of end caps includes one closed cap and one notched open cap that can accommodate wire up to 18 AWG. 5 sets per pack, Sold per pack.



<u>Code</u>	<u>Description</u>	<u>List/Pk</u>
DI-CPEC-SL	Slim End Caps, 5 sets	\$ 27.30

**OPTIONAL ACCESSORIES****Mini Terminal Junction Box**

An easy way to splice wiring in a lighting application. Rated for high and low voltage electrical connections up to 450V. Features a removable terminal block for easily connecting a pair of wires.



DI-0841



<u>Code</u>	<u>Description</u>	<u>List/ea</u>
DI-0841	Junction Box	\$ 6.07

**Splice Connector**

Connects indoor LED tape light to 12V power supply. 24", 8mm single color.



<u>Code</u>	<u>List/ea</u>
DI-0856	\$ 9.71

10

**Flexible Extension**

Connects two LED tape light sections and lets them make any 10-180° turn inside picture frames, display cases, and more. 8mm single color.




<u>Code</u>	<u>Length</u>	<u>List/ea</u>
DI-0860	3"	\$ 7.28
DI-0896	6"	10.61
DI-0897	12"	10.92

## GROMMETS


### LARGE PLASTIC CABLE GROMMET

Sugatsune

6-9/16" L x 3" W (overall)



Hole Size

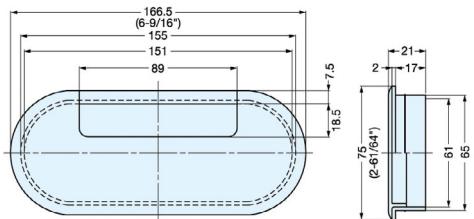

<u>Code</u>	<u>Color</u>	<u>Ctn</u>	<u>List/ea</u>
S165-76B	Black	10 ea.	\$ 8.09

10

### TRASH GROMMET



6" Hole, 6.8" Overall.

6" round finishing grommet to provide clean finished look. Often used to line trash receptacles. Black in color.

<u>Code</u>	<u>Color</u>	<u>Ctn</u>	<u>List/ea</u>
1044BK	Black	10 ea.	\$ 6.66

### TRASH CAN RING

Stainless Steel



6" Diameter,  
1" and 2" Depths.

<u>Code</u>	<u>Depth</u>	<u>Finish</u>	<u>List/ea</u>
TR6X1.SS	1"	Stainless Steel	\$ 43.62
TR6X2.SS	2"	Stainless Steel	74.14

### PLASTIC GROMMETS

#1041  
1" Hole  
Grommet#1039  
1-3/4" Hole  
Grommet#1031  
2-1/2" Hole  
Grommet

1" Bore,  
1-1/8" Overall.  
Accepts cords  
up to 13/16" wide.

1-3/4" Bore,  
2" Overall.  
Accommodates  
most office machine  
plugs up to 1-5/8".

2-1/2" Bore,  
3" Overall.  
Fits plugs up to  
2-1/4", suited for  
most computer uses.

### 1" Bore, 1-1/8" Overall

<u>Code</u>	<u>Color</u>	<u>Ctn</u>	<u>List/ea</u>
1041BK	Black	10 ea.	\$ 2.99
1041BR	Brown	10	2.90
1041WH	White	10	3.70
1041GY	Gray	10	2.90

### 1-3/4" Bore, 2" Overall

1039BK	Black	10 ea.	\$ 2.93
1039BR	Brown	10	2.93
1039WH	White	10	2.93
1039GY	Gray	10	2.93

### 2-1/2" Bore, 3" Overall

1031BK	Black	10 ea.	\$ 3.85
1031BR	Brown	10	2.96
1031WH	White	10	2.96
1031GY	Gray	10	2.96
1031AL	Almond	10	2.92

### ELECTRIC TRIM RING

Single box, White




Designed to clean up electrical cutouts in the back of cabinets. For a single gang box and can be trimmed to specific return depths. Paintable for your custom application. White in color.

<u>Code</u>	<u>Description</u>	<u>List/ea</u>
ETR-SINGLE-WH	Trim Ring for single electric cutout	\$ 9.19



## WIRE ORGANIZATION

### WIRE ORGANIZER CHANNELS



Go from this...



to this.




Plastic wire channel is used to store and organize wire and cable on such items as entertainment centers, computer work stations, etc. Black in color with self-adhesive tape. Length: 2.5 meters (98.43").

<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
CPIWM1500T	36	\$ 39.57

### WIRE ORGANIZER CLIPS

Same as above except in 1" strips. Black in color. Projection: 1.09" Each piece has self-adhesive tape.



<u>Code</u>	<u>Ctn</u>	<u>List/ea</u>
CPIWM1500C	1000	\$ .42

### VENTS



C816



84126


Economy vents with high performance, rustproof aluminum, ventilates 44 to 129 square feet. Embossed margin adds rigidity. Revolutionary louver design boosts free area 11% - 17% yet is priced 20% - 40% lower than ordinary undereaves ventilators. 8x8 perma-coated aluminum screen attached for added protection.

<u>Code</u>	<u>Overall Dimensions</u>	<u>Ctn</u>	<u>List/ea</u>
84126	16" x 4"	24	\$ 8.67
C816	16" x 8"	72	8.85

## VENTS AND LOUVERS

### CABINET VENTILATING LOUVERS

Washington Products




For apron above sink door. Outside dimensions: 10-7/16" x 2-7/8". Cut-Out dimensions: 9" x 2-1/2". 12 per box.

<u>Code</u>	<u>Finish</u>	<u>List/ea</u>
12-26	Bright Chrome	\$ 19.47

### MINIATURE VENTS

Under eave mounted attic intake vent. Louvers are stamped and formed, and the screen is securely held in place. Must be used in conjunction with adequate exhaust vents for proper operation. Mill finish. Screen: 10 mil, 8x8 mesh Aluminum Screen.



CV-1, CV-2, CV-3  
6 ea. per pack,  
Full packs only.

CV-4  
Bulk - order  
per each.

<u>Code</u>	<u>Dia.</u>	<u>Rough Opening</u>	<u>Pack</u>	<u>List</u>
CV-1	1-1/4"	1"	6	\$ 2.81
CV-2	2-1/4"	2"	6	4.35
CV-3	3-1/2"	3"	6	4.53
CV-4	4-1/2"	4"	1	7.53