

**Elite Plus Slide System**  
**100 lb load capacity**  
**Maximum drawer width: 36"**


**G\*GRASS®**

**ELITE PLUS** undermount slide brings fast installation, easy adjustment, and smooth running performance at a great value. Offered in a full range of lengths for frameless and face frame cabinetry, it features full drawer extension for maximum use of interior space. Elite is packed with performance features like a positive stop, an integrated European liquid damper, and a load capacity of 100 lb.




**DRAWER INSTALLATION DIMENSIONS**

**16mm Drawer**

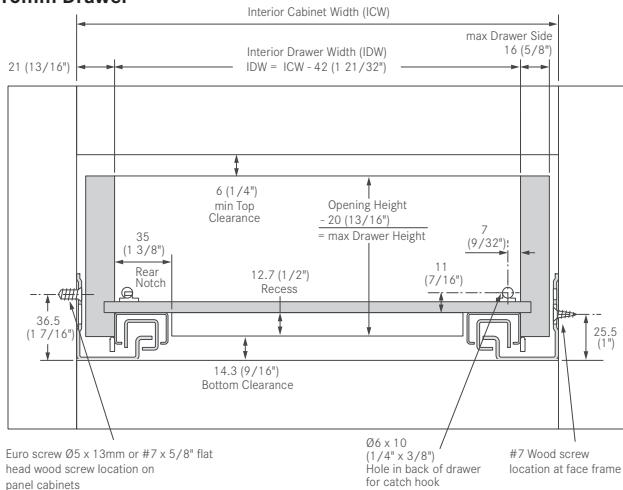

**19mm Drawer**

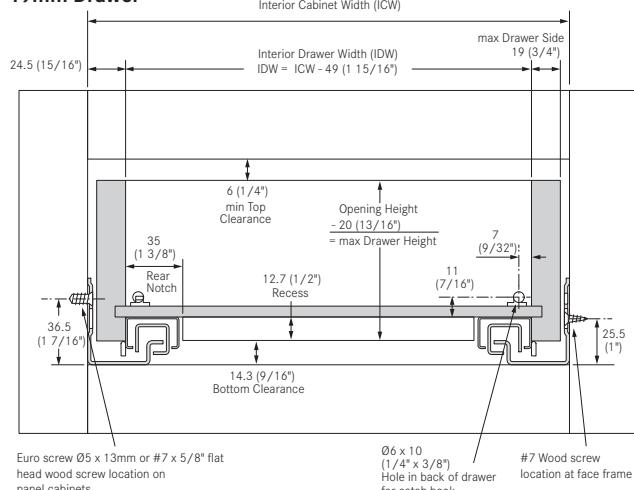

**APPLICATIONS**

Institutional  
 Residential  
 Commercial

**SPECIFICATIONS**

Product:	Undermount Drawer Slides
Mounting:	Side
Connect/Disconnect:	Self-latching Front Locking Devices
Material:	Galvanized Cold-rolled Steel
Hole Pattern:	32mm
Face Frame Mounting:	Yes
Drawer Material:	12.7mm (1/2") to 16mm (5/8") and 16mm (5/8") to 19mm (3/4")
Travel:	Full Extension
Length:	240mm (9 7/16"), 305mm (12"), 381mm (15"), 457mm (18"), 533mm (21")
Action:	Soft-close
Slide Configuration:	Handed
Finish:	Corrosion Resistant Zinc Coated Steel
Packaging:	5 Sets per Corrugated Carton (All Sizes), Bulk 15"-21" 200 Sets per Pallet

**RATINGS**

Load: 100 lb  
 Max. Drawer Width: 36"

**ELITE PLUS** meets and exceeds ANSI/BHMA A156.9 Grade 1 testing requirements.

**WARRANTY**

Limited Lifetime Warranty

This and other Grass literature is available to download at [www.grassusa.com](http://www.grassusa.com)  
 Grass America Inc. reserves the right to change product specification at any time without notice and without incurring responsibility for existing units.  
 ©Grass America Inc.


**G\*GRASS®**

REAR MOUNTING BRACKETS




NON-HANDED

Rear Bracket for Face Frame

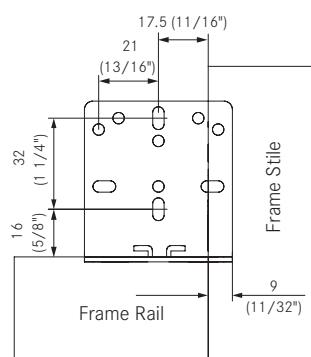

Face Frame

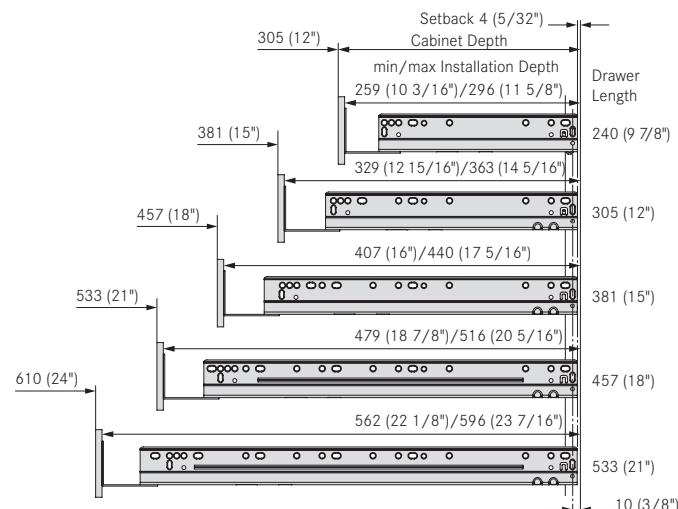

FRONT LOCKING DEVICES



Flanged front locking device with height adjustment +2.5mm (3/32")



Front locking device with height adjustment +2.5mm (3/32")



Flanged front locking device with height adjustment +2.5mm (3/32") with side adjustment ±1.5mm (1/16")



Front locking device with height adjustment +2.5mm (3/32") with side adjustment ±1.5mm (1/16")

Frameless

