

NOVA PRO SCALA



DRAWER SYSTEM



NOVA PRO SCALA
FULL CATALOG



TIMELESS. ELEGANT. EFFICIENT.

The NOVA PRO SCALA double-wall drawer system brings timeless elegance, rapid assembly, and cost controls to the residential and commercial construction markets. Featuring unparalleled quality, stability, running performance, and versatility, the Nova Pro Scala allows cabinet manufacturers to create beautiful, distinctive kitchens, baths, and closet spaces to match any decor. Grass offers Nova Pro Scala in four heights, nine lengths, and three finishes: Silver, Ice, and Stone or fabricate your own custom side panel covers.

Product: Double Wall Steel Drawer System

Mounting: Undermount

Material: Steel with Corrosion Resistant Finish

Hole Pattern: 32mm

Type: Steel Drawer System

Travel: Synchronized Full Extension

Length: 270mm (11"), 300mm (12"), 350mm (14"),
400mm (16"), 450mm (18"), 500mm (20"),
550mm (22"), 600mm (24"), 650mm (26")

Side Width: 13mm (1/2")

Height(s): 63mm (2 1/2"), 90mm (3 1/2"),
186mm (7 5/16"), 250mm (9 13/16")

Action: Soft-close

Slide Configuration: Handed

Finish: Stone, Ice, Silver

Packaging: 10 Sets per Corrugated Carton for 63mm (2 1/2"),
90mm (3 1/2"), and 186mm (7 5/16") Side Height
5 Sets per Corrugated Carton for 250mm (9 13/16")
Side Height

RAPID ASSEMBLY WITH TECMATOR



MULTIPLE COLOR OPTIONS



NOVA PRO SCALA, an integrated drawer concept designed to meet a wide range of requirements and market needs.



- Smooth and silent soft-closing action
- 2 and 3-dimensional adjustments for perfect alignment
- Compatible with 32mm indexing and 50mm length increments
- Tool-free drawer front removal and installation
- Compatible with Tipmatic Soft-close and Sensomatic
- Designer panels can be added to offer new design possibilities
- Drawer railing and organization options
- Available in Silver, Stone, and Ice finishes
- Suitable for drawers up to 47" wide

NOVA PRO SCALA meets and exceeds ANSI/BHMA A156.9 Grade 1 testing requirements.




TECMATOR
RAPID ASSEMBLY DEMO

NOVA PRO
VIRTUAL TOUR


DRAWER INSTALLATION DIMENSIONS

63mm (2 1/2")

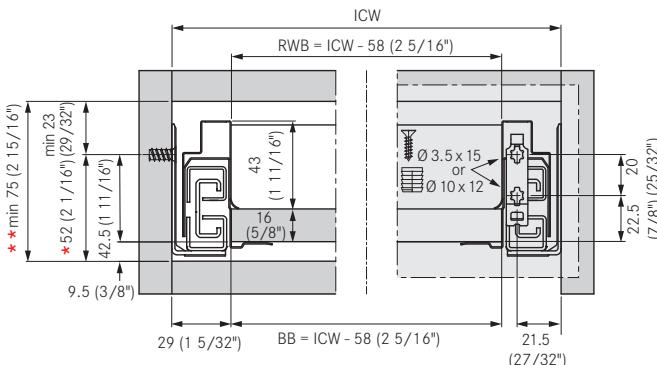


** Recommendation/Minimum Dimension:
Soft-Close: 72.5mm (2 7/8")
Tipmatic Soft-close: 81mm (3 3/16")

90mm (3 1/2")

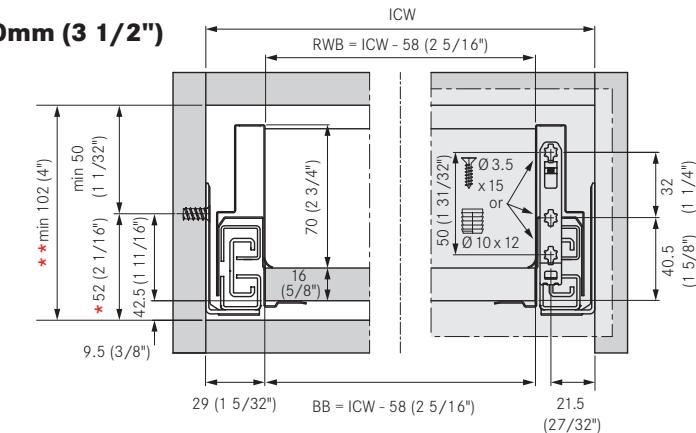


** Recommendation/Minimum Dimension:
Soft-Close: 99.5mm (3 15/16")
Tipmatic Soft-close: 108mm (4 1/4")

186mm (7 5/16")

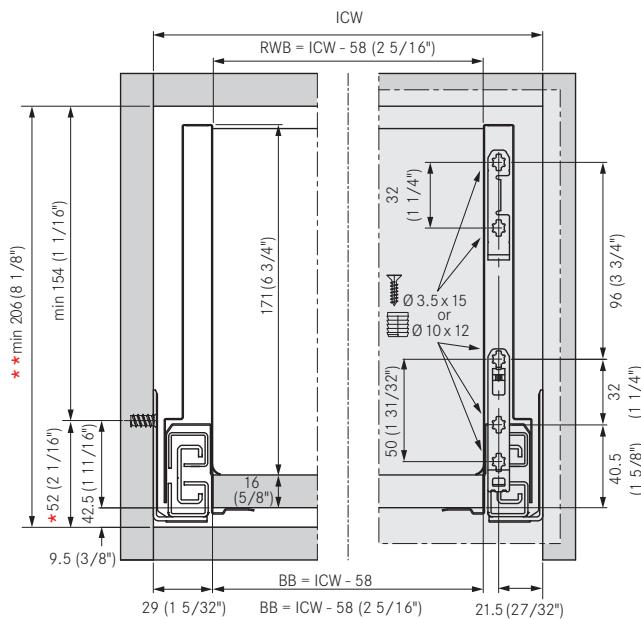

** Recommendation/Minimum Dimension:
Soft-Close: 203.5mm (8")
Tipmatic Soft-close: 212mm (8 3/8")

250mm (9 13/16")

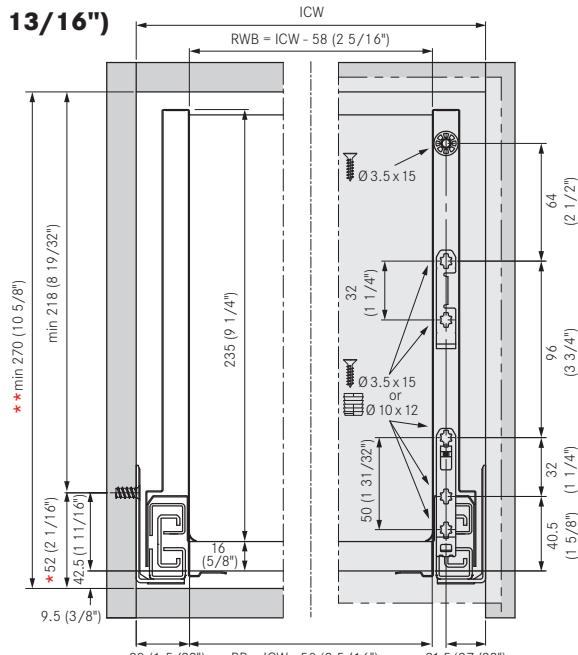

** Recommendation/Minimum Dimension:
Soft-Close: 267.5mm (10 9/16")
Tipmatic Soft-close: 276mm (10 7/8")