

ZBOX DRAWER SYSTEM




G*GRASS®

THE 2 MINUTE DRAWER

ZBOX combines the durability and quick assembly of Zargen metal drawer sides with the reliability and strength of full extension ball bearing slides. Taking a traditional five-panel drawer box down to three, ZBox can be assembled in less than 2 minutes. It's the perfect solution for commercial and residential cabinetry.

Product: Single Wall Steel Drawer System
Mounting: Side
Disconnect: Easy Lever Disconnect
Material: Steel with Corrosion Resistant Finish
Hole Pattern: 32mm and Traditional
Face Frame Mounting: Yes
Type: Ball-Bearing
Travel: Full Extension
Length: 350mm (13 3/4"), 400mm (15 3/4"), 470mm (18 1/2"), 510mm (20 1/16"), 550mm (21 5/8")
Clearance: 15.5mm (5/8") on each side
Height(s): 85mm (3 3/8"), 149mm (5 7/8"), 213mm (8 3/8")
Action: Telescopic
Slide Configuration: Handed
Finish: White Epoxy Side and Corrosion Resistant Zinc Coated Steel Ball Bearing Slide
Packaging: All Sizes 5 Sets Per Corrugated Carton

RAPID ASSEMBLY WITH ZRAM

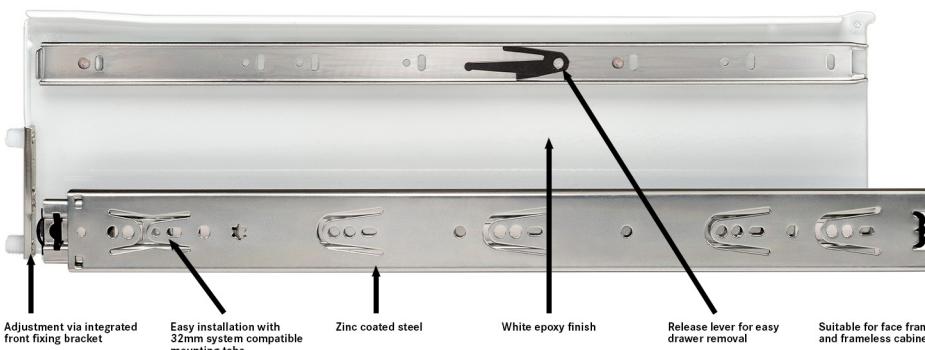

ZARGEN
2 MINUTE
DRAWER SLIDE



ZBOX
FULL CATALOG


Assembled in the USA, ZBOX is a completely integrated ball bearing drawer slide and metal drawer system featuring full extension and 100 lb. load capacity. The combined strength of the ball bearing slides with the Zargen's steel construction offers a drawer solution that saves time and money with its quick drawer box construction and simple installation.



- Integrated ball bearing slide and metal drawer side
- Ball bearing telescopic full extension
- Hold-in detent ensures drawers stay closed
- Lever disconnect for easy drawer box removal
- Drawer side – white epoxy finish; drawer slide – zinc coated steel
- Load capacity: 100 lbs
- File railing accessories available

ZBOX meets and exceeds **ANSI/BHMA A156.9 Grade 1** testing requirements.


Clearance: 15.5mm (5/8")

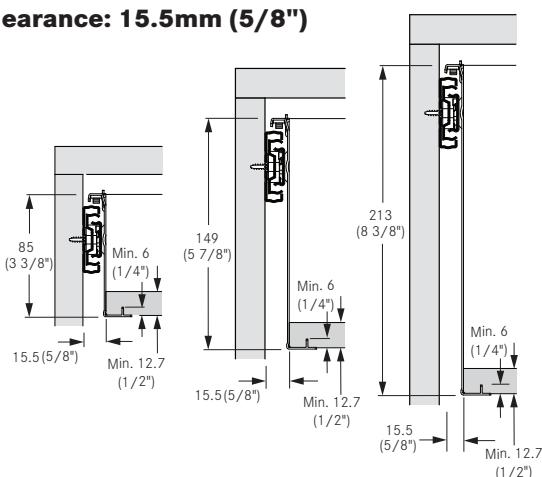


Clearance: 15.5mm (5/8")



Face-Frame

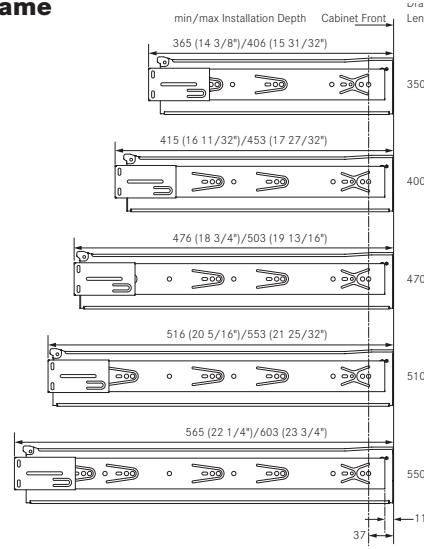

Frameless

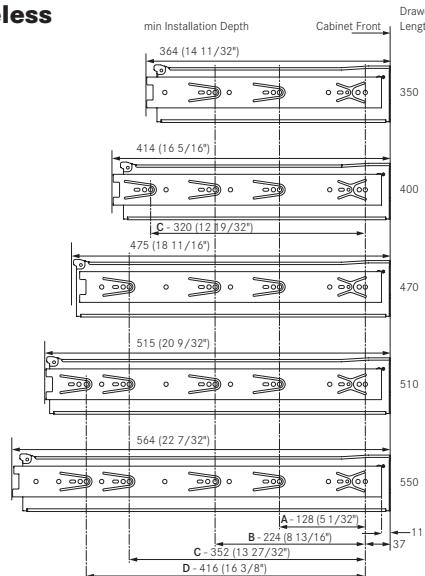

Drawer Length	Slide Travel	Screw Hole Locations				Face Frame		Frameless
		A	B	C	D	Min	Max	Min
350 (13 3/4")	350	128	224			365 (14 3/8")	406 (15 31/32")	364 (14 11/32")
400 (15 3/4")	400	128	224	320		415 (16 11/32")	453 (17 27/32")	414 (16 5/16")
470 (18 1/2")	450	128	224	352		476 (18 3/4")	503 (19 13/16")	475 (18 11/16")
510 (20 1/16")	500	128	224	352	416	516 (20 5/16")	553 (21 25/32")	515 (20 9/32")
550 (21 5/8")	550	128	224	352	416	565 (22 1/4")	603 (23 3/4")	564 (22 7/32")