



PRIDE INDUSTRIAL LLC
DECORATIVE, FUNCTIONAL HARDWARE & MORE

DOUBLE-WALL DRAWER
SYSTEMS

MEGA PRO



MEGA PRO

The Metal Straight-sided Slim Drawer

A Perfect Mix of Function
and Elegance



- Linear slim drawer sides - a fashion look and elegant appearance
- Perfect connection between components makes a beautiful drawer



Quietness



Intelligence




Durability



Eco-Friendliness

MEGA PRO

HD11 Series Straight-sided Drawer System (Low Drawer: M Height)




PRODUCT




DESCRIPTION

- Concealed, full extension
- Load capacity: 40kg
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- 2D adjustment: Up & down adjustment:
±2mm, left & right adjustment:±1.5mm
- Finish: Silk white(E29), Grey matt(E30)

SPACE REQUIREMENT

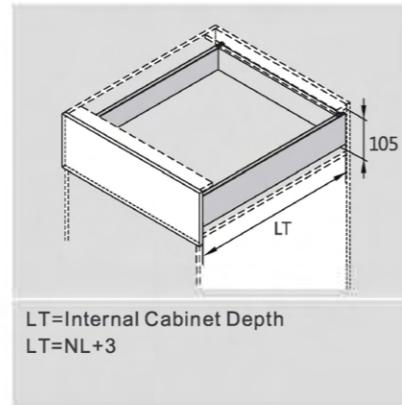


LOW DRAWER FOR WOOD DRAWER BACK

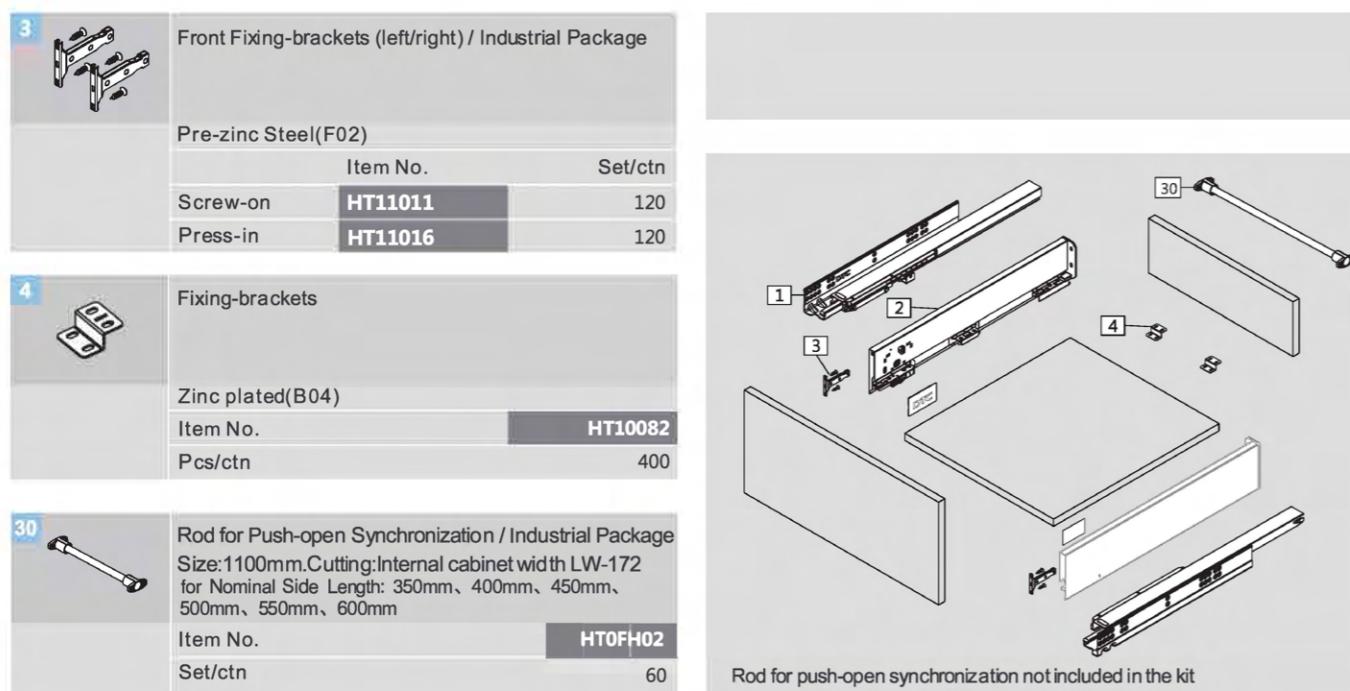

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

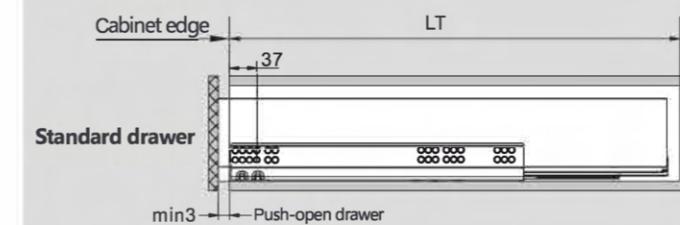


Cabinet Configuration

Cabinet widths/KB(mm)	Soft close drawer Stabilizer	Push-open drawer Synchronization rod	
300	—	○	
350	—	○	
400	—	○	
450	—	○	
500	—	○	
600	—	○	
800	○	●	
900	○	●	
1000	○	●	
1200	○	●	

Screw Positions of the Slides(mm)

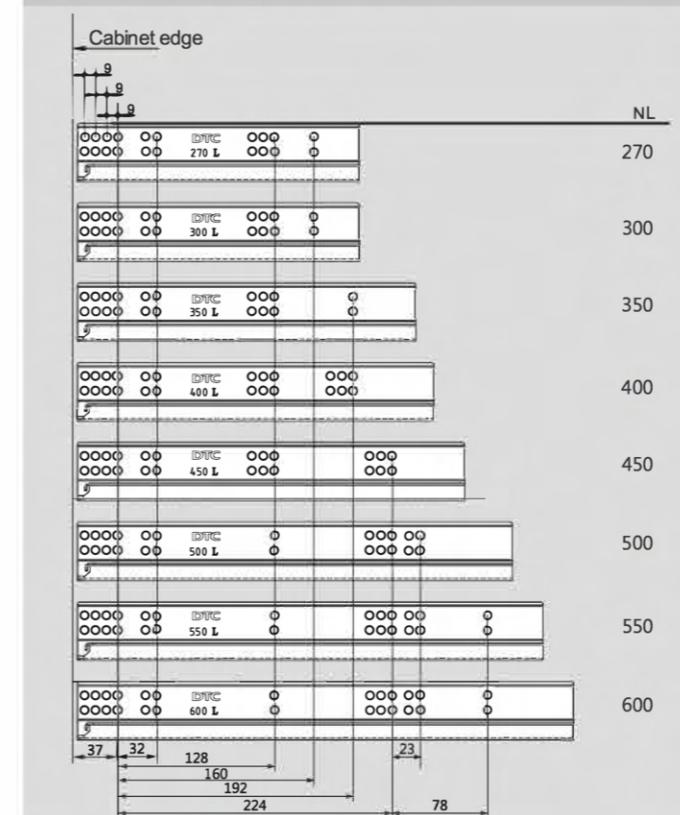

Installation Dimensions(mm)

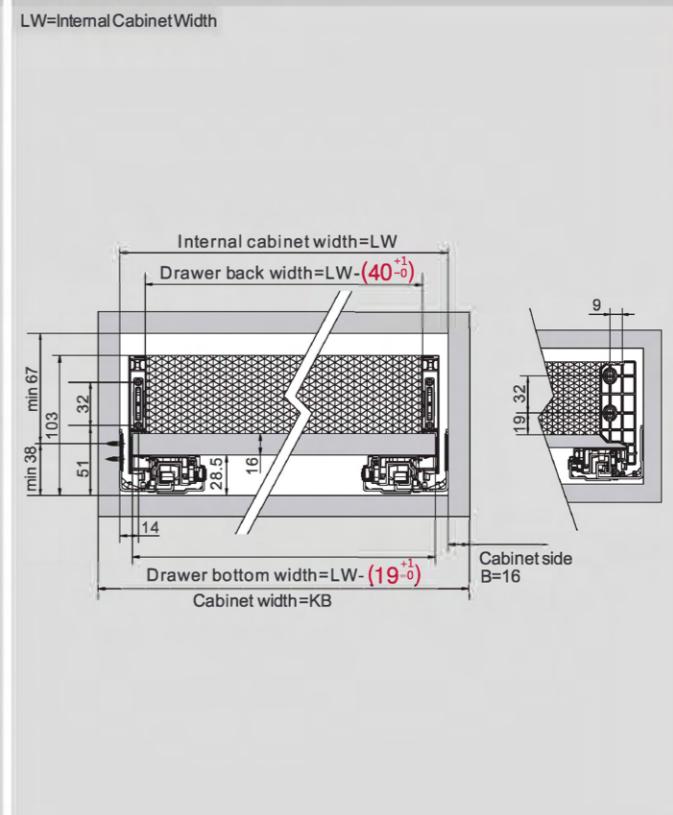

Drawer Front, Back and Bottom Dimensions(mm)



MEGA PRO

HD11 Series Straight-sided Drawer System (Low Inner Drawer: M Height)


PRODUCT



DESCRIPTION

- Concealed, full extension
- Load capacity: 40kg
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- 2D adjustment: Up & down adjustment: $\pm 2\text{mm}$, left & right adjustment: $\pm 1.5\text{mm}$
- Finish: Silk white(E29), Grey matt(E30)


SPACE REQUIREMENT

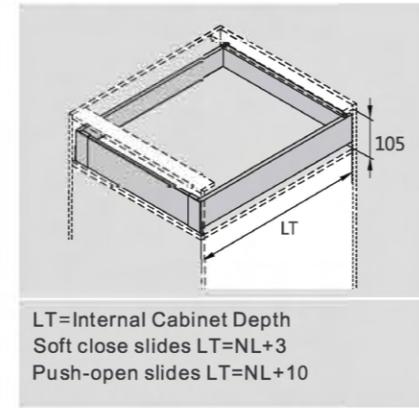

PLANNING

Installation Dimensions(mm)

NL=Nominal Slide Length
LT=Internal Cabinet Depth
Soft close slides LT=NL+3
Push-open slides LT=NL+10

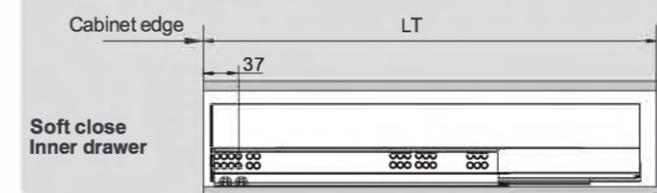


Cabinet Configuration

Cabinet widths/KB(mm)	Soft close drawer Stabilizer	Push-open drawer Synchronization rod	
300	—	○	not recommended
350	—	○	○ recommended
400	—	○	
450	—	○	
500	—	○	
600	—	○	
800	○	●	strongly recommended
900	○	●	
1000	○	●	
1200	○	●	



LOW INNER DRAWER FOR WOOD DRAWER BACK

Kit Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Soft Close item No.	Set/ctn
270mm	HD11270Q11	1
300mm	HD11300Q11	1
350mm	HD11350Q11	1
400mm	HD11400Q11	1
450mm	HD11450Q11	1
500mm	HD11500Q11	1
550mm	HD11550Q11	1
600mm	HD11600Q11	1
1 Slides (left/right) /Industrial Package		
Pre-zinc Steel(F02)		
NL	Soft Close item No.	Set/ctn
270mm	HD10270H	5
300mm	HD10300H	5
350mm	HD10350H	5
400mm	HD10400H	5
450mm	HD10450H	5
500mm	HD10500H	5
550mm	HD10550H	5
600mm	HD10600H	5
2 Drawer Sides and Cover Caps (left/right) /Industrial Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Item No.	Set/ctn
270mm	HE112701	5
300mm	HE113001	5
350mm	HE113501	5
400mm	HE114001	5
450mm	HE114501	5
500mm	HE115001	5
550mm	HE115501	5
600mm	HE116001	5
3 Front Fixing-brackets (left/right) / Industrial Package		
White(H03)! Dark Grey(H11)		
Item No.		
Set/ctn	60	
4 Fixing-brackets Zinc plated(B04)		
Item No.	HT10082	
Pcs/ctn	400	
5 Front Section / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-97		
Silk White(E29)! Grey Matt(E30)		
Item No.	HT10022	
Set/ctn	20	
30 Rod for Push-open Synchronization / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-172 for Nominal Side Length: 350mm, 400mm, 450mm, 500mm, 550mm, 600mm		
Item No.	HTOFH02	
Set/ctn	60	
Front section and rod for push-open synchronization not included in the kit		

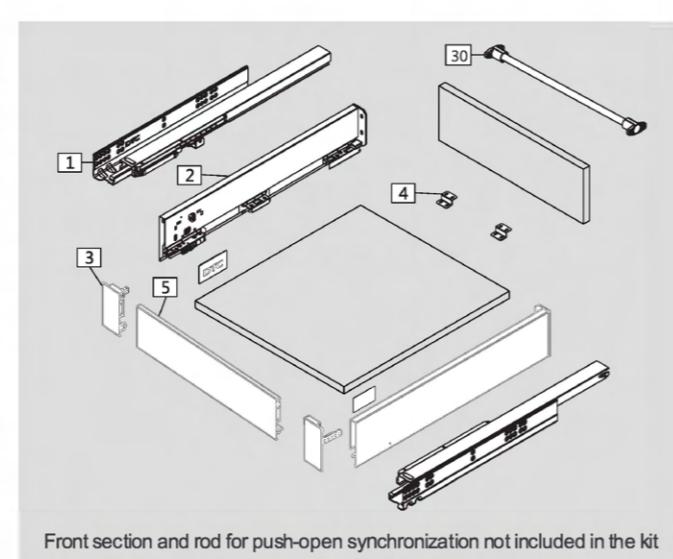


Front section and rod for push-open synchronization not included in the kit


Screw Positions of the Slides(mm)

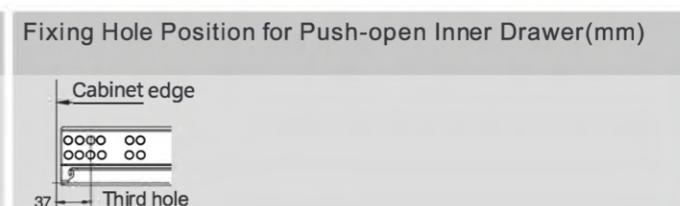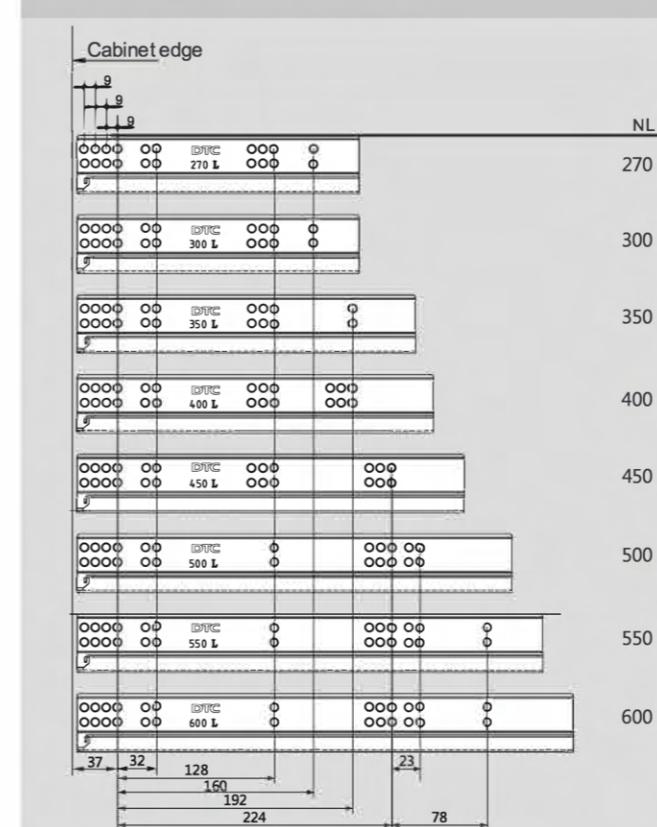

Fixing Hole Position for Push-open Inner Drawer(mm)

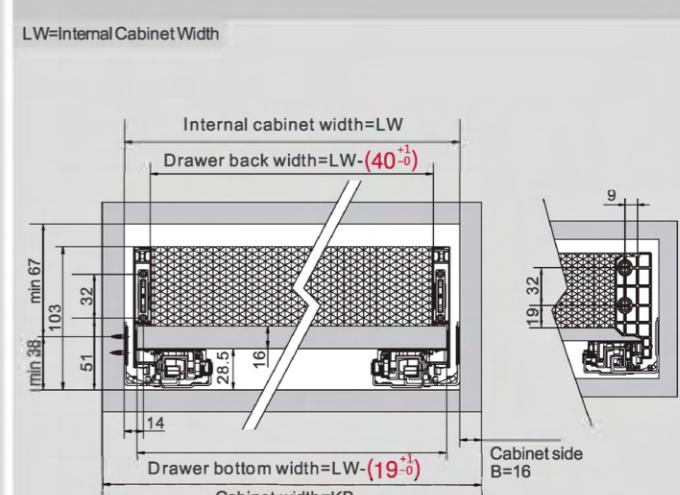

Front Section, Back and Bottom Dimensions(mm)

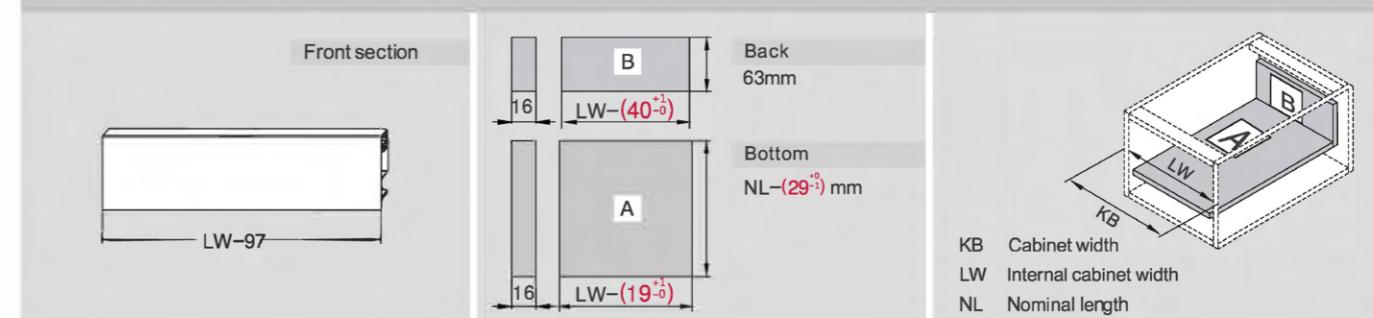

KB Cabinet width
LW Internal cabinet width
NL Nominal length

MEGA PRO

HD12 Series Straight-sided Drawer System (Medium Drawer: K Height)


PRODUCT



DESCRIPTION

- Concealed, full extension
- Load capacity: 40kg
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- 2D adjustment: Up & down adjustment: $\pm 2\text{mm}$, left & right adjustment: $\pm 1.5\text{mm}$
- Finish: Silk white(E29), Grey matt(E30)


SPACE REQUIREMENT

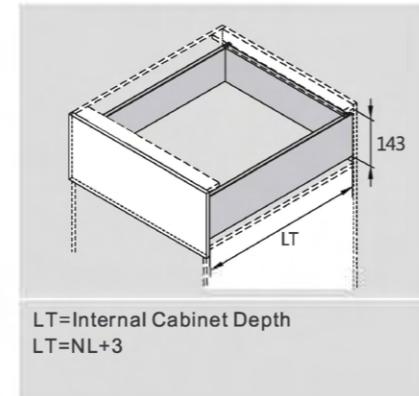

PLANNING

Installation Dimensions(mm)

NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

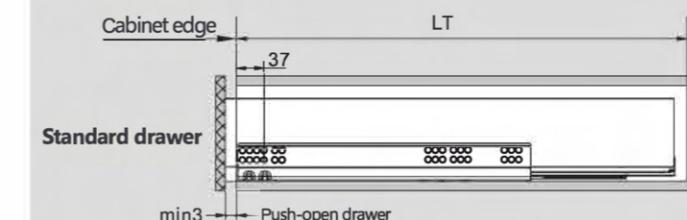

Cabinet Configuration

Cabinet widths/KB(mm)	Soft close drawer Stabilizer	Push-open drawer Synchronization rod	
300	-	○	not recommended
350	-	○	○ recommended
400	-	○	● strongly recommended
450	-	○	
500	-	○	
600	-	○	
800	○	●	
900	○	●	
1000	○	●	
1200	○	●	

MEDIUM DRAWER FOR WOOD DRAWER BACK

Kit Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Soft Close item No.	Set/ctn
270mm	HD12270A11	1
300mm	HD12300A11	1
350mm	HD12350A11	1
400mm	HD12400A11	1
450mm	HD12450A11	1
500mm	HD12500A11	1
550mm	HD12550A11	1
600mm	HD12600A11	1


1 Slides (left/right) /Industrial Package		
Pre-zinc Steel(F02)		
NL	Soft Close item No.	Set/ctn
270mm	HD10270H	5
300mm	HD10300H	5
350mm	HD10350H	5
400mm	HD10400H	5
450mm	HD10450H	5
500mm	HD10500H	5
550mm	HD10550H	5
600mm	HD10600H	5

2 Drawer Sides and Cover Caps (left/right) /Industrial Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Item No.	Set/ctn
270mm	HE122701	5
300mm	HE123001	5
350mm	HE123501	5
400mm	HE124001	5
450mm	HE124501	5
500mm	HE125001	5
550mm	HE125501	5
600mm	HE126001	5

3 Front Fixing-brackets (left/right) / Industrial Package		
Pre-zinc Steel(F02)		
Item No.	Set/ctn	
Screw-on	HT12011	120
Press-in	HT12016	120


4 Fixing-brackets		
Zinc plated(B04)		
Item No.		HT10082
Pcs/ctn		400

30 Rod for Push-open Synchronization / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-172 for Nominal Side Length: 350mm, 400mm, 450mm, 500mm, 550mm, 600mm		
Item No.		HTOFH02
Set/ctn		60

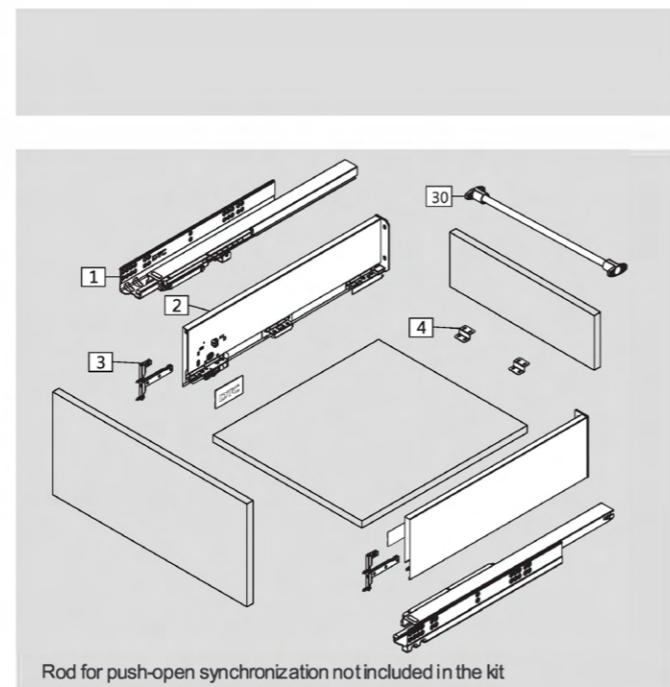



Rod for push-open synchronization not included in the kit

Drawer Front, Back and Bottom Dimensions(mm)

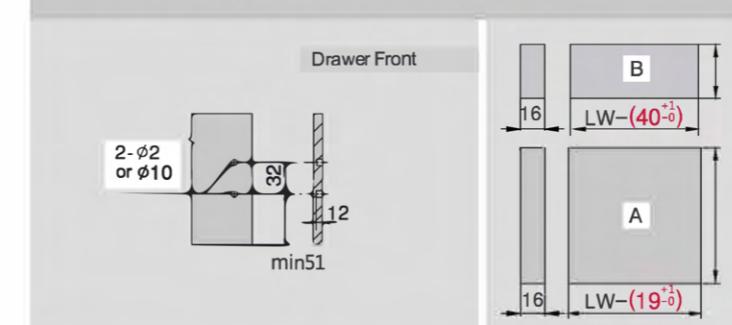


Installation Dimensions(mm)

LW=Internal Cabinet Width

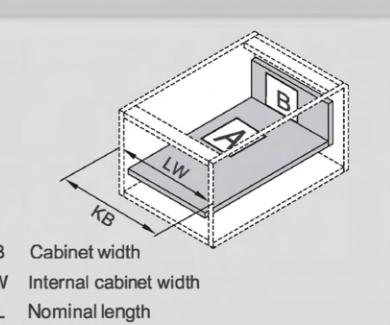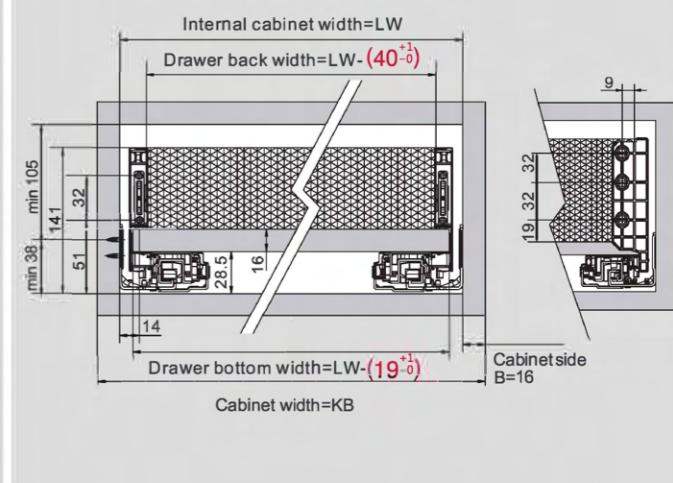

MEGA PRO

HD13 Series Straight-sided Drawer System (High Drawer: C Height)



PRIDE INDUSTRIAL LLC
DECORATIVE, FUNCTIONAL HARDWARE & MORE


PRODUCT



DESCRIPTION


- Concealed, full extension
- Load capacity: 40kg
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- 2D adjustment: Up & down adjustment: $\pm 2\text{mm}$, left & right adjustment: $\pm 1.5\text{mm}$
- Finish: Silk white(E29), Grey matt(E30)

SPACE REQUIREMENT

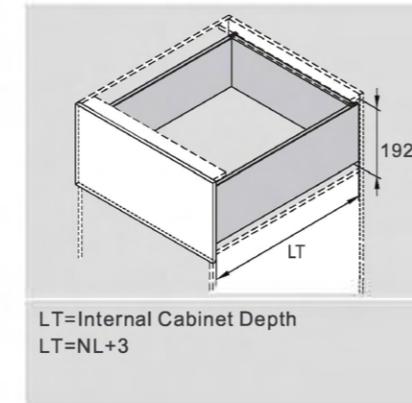

HIGH DRAWER FOR WOOD DRAWER BACK


Kit Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Soft Close item No. 40	Set/ctn
270mm	HD13270A11	1
300mm	HD13300A11	1
350mm	HD13350A11	1
400mm	HD13400A11	1
450mm	HD13450A11	1
500mm	HD13500A11	1
550mm	HD13550A11	1
600mm	HD13600A11	1
1 Slides (left/right) /Industrial Package		
Pre-zinc Steel(F02)		
NL	Soft Close item No. 40	Set/ctn
270mm	HD10270H	5
300mm	HD10300H	5
350mm	HD10350H	5
400mm	HD10400H	5
450mm	HD10450H	5
500mm	HD10500H	5
550mm	HD10550H	5
600mm	HD10600H	5
2 Drawer Sides and Cover Caps (left/right) /Industrial Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Item No.	Set/ctn
270mm	HE132701	5
300mm	HE133001	5
350mm	HE133501	5
400mm	HE134001	5
450mm	HE134501	5
500mm	HE135001	5
550mm	HE135501	5
600mm	HE136001	5
3 Front Fixing-brackets (left/right) / Industrial Package		
Pre-zinc Steel(F02)		
Item No.	Set/ctn	
Screw-on	HE13011	120
Press-in	HE13016	120
4 Fixing-brackets		
Zinc plated(B04)		
Item No.		HT10082
Pcs/ctn		400
30 Rod for Push-open Synchronization / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-172 for Nominal Side Length: 350mm, 400mm, 450mm, 500mm, 550mm, 600mm		
Item No.		HTOFH02
Set/ctn		60
Rod for push-open synchronization not included in the kit		

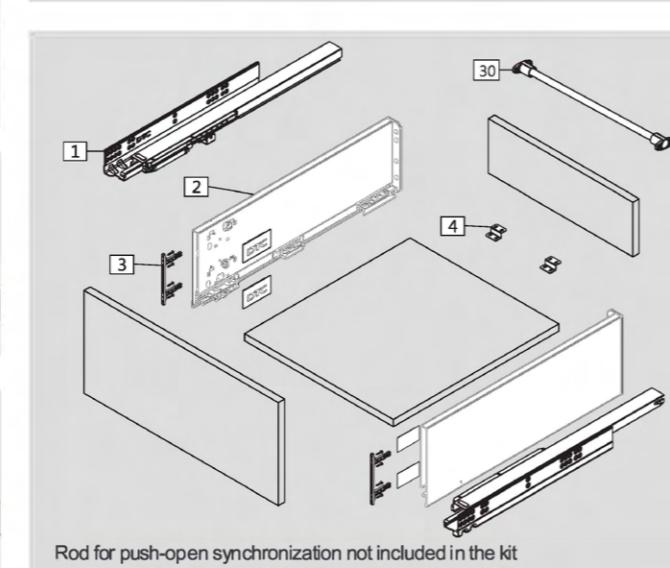

PLANNING

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

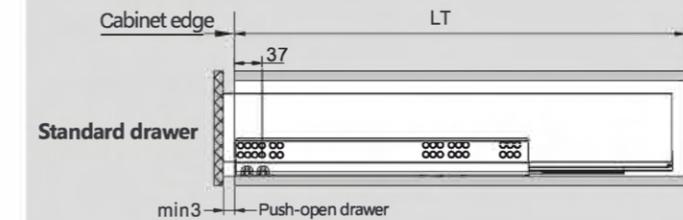

Cabinet Configuration


Cabinet widths/KB(mm)	Soft close drawer Stabilizer	Push-open drawer Synchronization rod	
300	-	○	not recommended
350	-	○	○ recommended
400	-	○	○ recommended
450	-	○	○ recommended
500	-	○	○ recommended
600	-	○	○ recommended
800	○	●	strongly recommended
900	○	●	strongly recommended
1000	○	●	strongly recommended
1200	○	●	strongly recommended

Screw Positions of the Slides(mm)


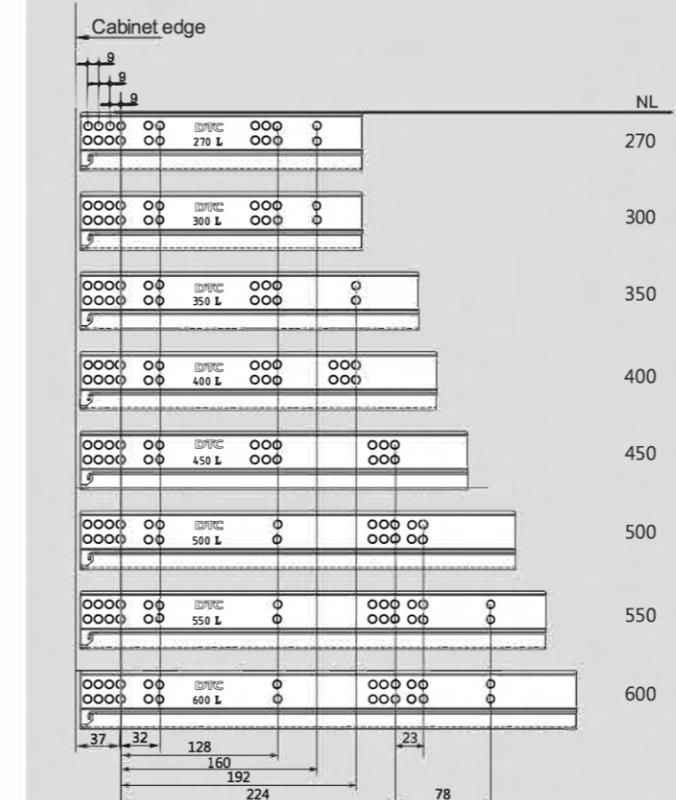


Installation Dimensions(mm)

LW=Internal Cabinet Width

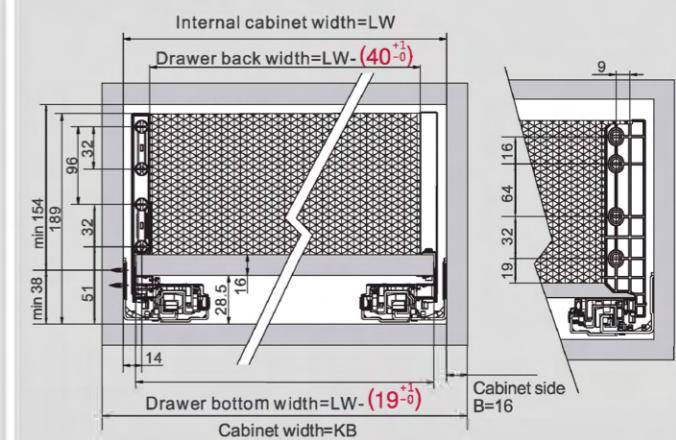


Drawer Front, Back and Bottom Dimensions(mm)

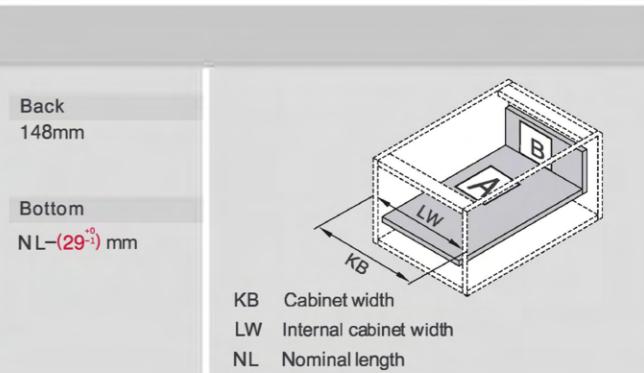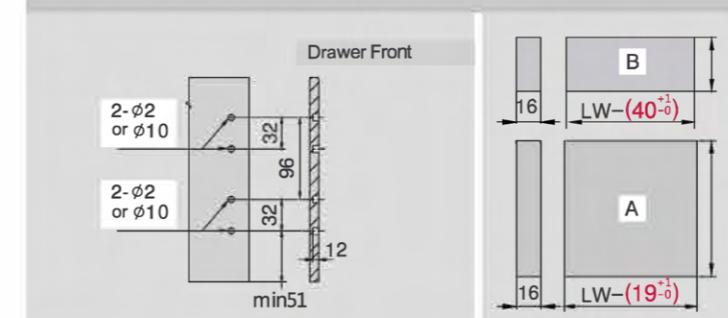

MEGA PRO

HD13 Series Straight-sided Drawer System (High Inner Drawer: C Height)




PRODUCT



DESCRIPTION

- Concealed, full extension
- Load capacity: 40kg
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- 2D adjustment: Up & down adjustment: $\pm 2\text{mm}$, left & right adjustment: $\pm 1.5\text{mm}$
- Finish: Silk white(E29), Grey matt(E30)


SPACE REQUIREMENT

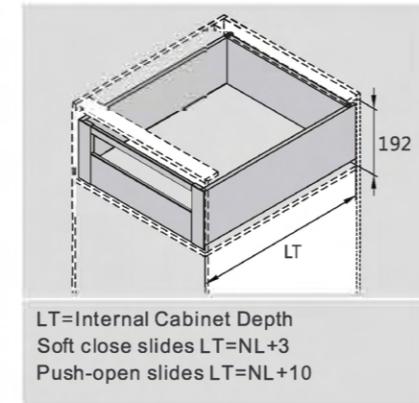

PLANNING

Installation Dimensions(mm)

NL=Nominal Slide Length
LT=Internal Cabinet Depth
Soft close slides LT=NL+3
Push-open slides LT=NL+10

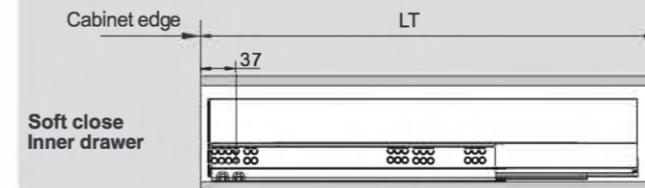


Cabinet Configuration


Cabinet widths/KB(mm)	Soft close drawer Stabilizer	Push-open drawer Synchronization rod	
300	-	○	not recommended
350	-	○	○ recommended
400	-	○	○ recommended
450	-	○	○ recommended
500	-	○	○ recommended
600	-	○	○ recommended
800	○	●	strongly recommended
900	○	●	strongly recommended
1000	○	●	strongly recommended
1200	○	●	strongly recommended

HIGH INNER DRAWER WITH SQUARE CROSS RAIL FOR WOOD DRAWER BACK


Kit Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Soft Close item No.	Set/ctn
270mm	HD13270Q11	1
300mm	HD13300Q11	1
350mm	HD13350Q11	1
400mm	HD13400Q11	1
450mm	HD13450Q11	1
500mm	HD13500Q11	1
550mm	HD13550Q11	1
600mm	HD13600Q11	1
1 Slides (left/right) /Industrial Package		
Pre-zinc Steel(F02)		
NL	Soft Close item No.	Set/ctn
270mm	HD10270H	5
300mm	HD10300H	5
350mm	HD10350H	5
400mm	HD10400H	5
450mm	HD10450H	5
500mm	HD10500H	5
550mm	HD10550H	5
600mm	HD10600H	5
2 Drawer Sides and Cover Caps (left/right) /Industrial Package		
Silk White(E29)! Grey Matt(E30)!		
NL	Item No.	Set/ctn
270mm	HE132701	5
300mm	HE133001	5
350mm	HE133501	5
400mm	HE134001	5
450mm	HE134501	5
500mm	HE135001	5
550mm	HE135501	5
600mm	HE136001	5
3 Front Fixing-brackets (left/right) / Industrial Package		
White(H03)! Dark Grey(H11)		
Item No.		
Set/ctn	HD13014	60
4 Fixing-brackets Zinc plated(B04)		
Item No.		
Pcs/ctn	HT10082	400
5 Front Section / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-97		
Silk White(E29)! Grey Matt(E30)		
Item No.		
Set/ctn	HT10022	20
30 Rod for Push-open Synchronization / Industrial Package		
Size:1100mm.Cutting:Internal cabinet width LW-172 for Nominal Side Length: 350mm, 400mm, 450mm, 500mm, 550mm, 600mm		
Item No.		
Set/ctn	HT0FH02	60
Front section, cross rail and rod for push-open synchronization not included in the kit		

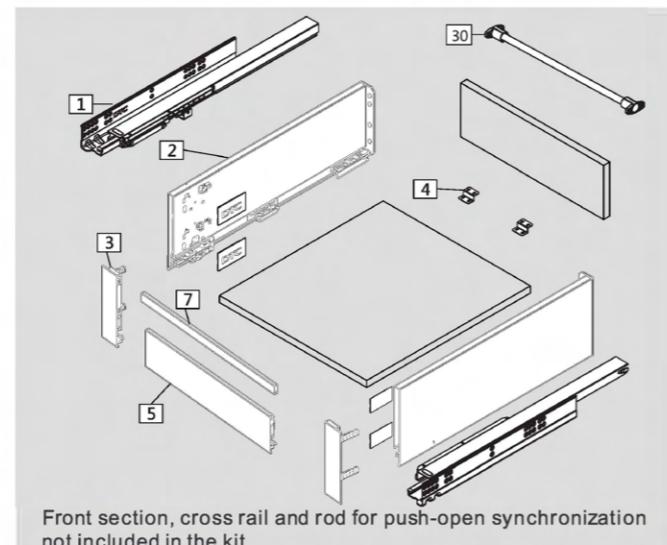

Screw Positions of the Slides(mm)

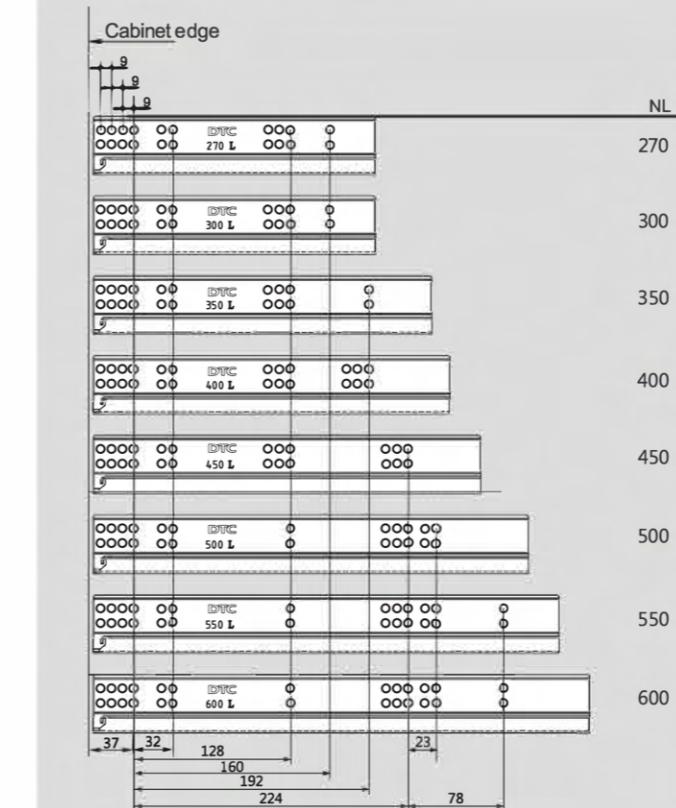


Fixing Hole Position for Push-open Inner Drawer(mm)



Installation Dimensions(mm)

LW=Internal Cabinet Width

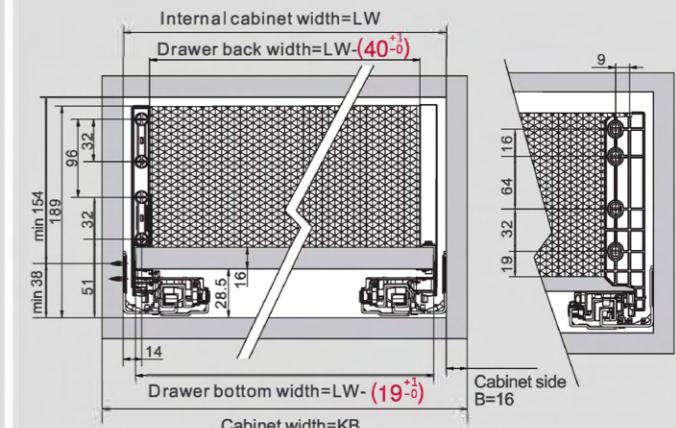

Front Section, Back and Bottom Dimensions(mm)




ASSEMBLY AND ADJUSTMENT

Assembly and Adjustment(for MEGA PRO)




PRIDE INDUSTRIAL LLC
DECORATIVE, FUNCTIONAL HARDWARE & MORE

Drawer Assembly

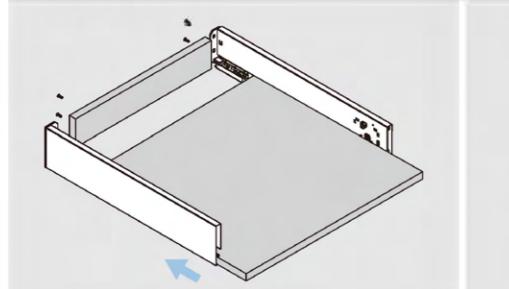



Back and Bottom assembly

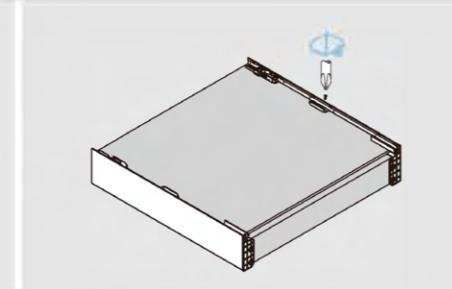


Fix screws



Front assembly

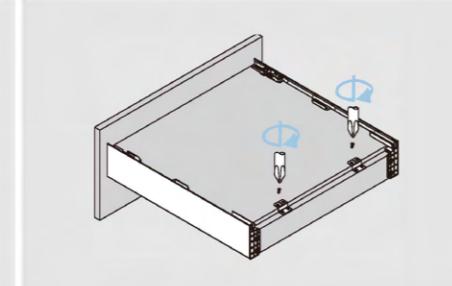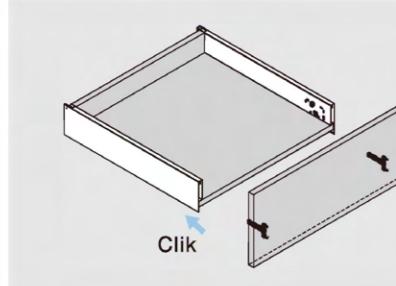


Fixing-brackets assembly

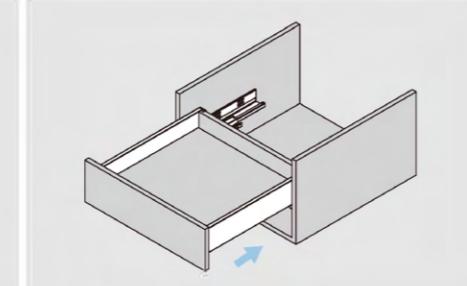


Slide into the cabinet

Adjustments for High Drawer (C Height)

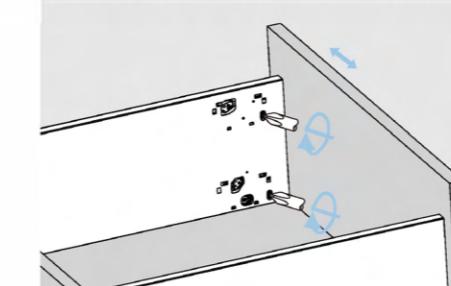


Left&right adjustment

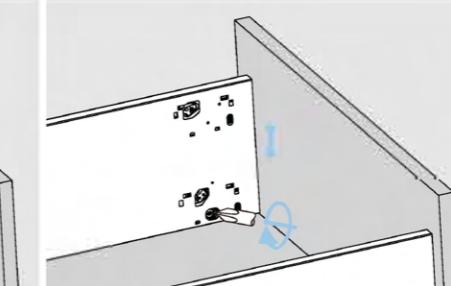


Up&down adjustment


Removal of High Drawer (C Height)

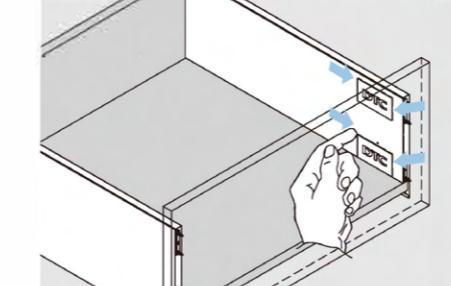

Tip up the cover and pull out

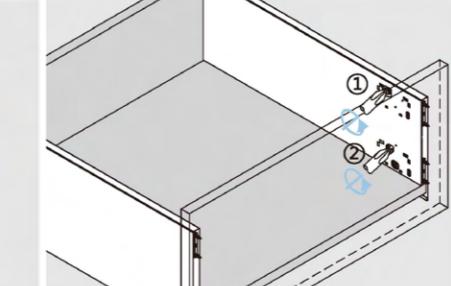


Turn screw driver to release the drawer front

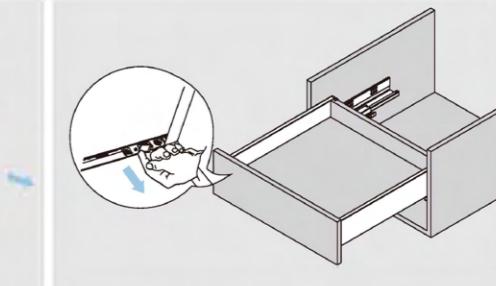


Press the locking device under drawer bottom and pull out the drawer

Adjustments for Lower/Medium Drawer(M/K Height)


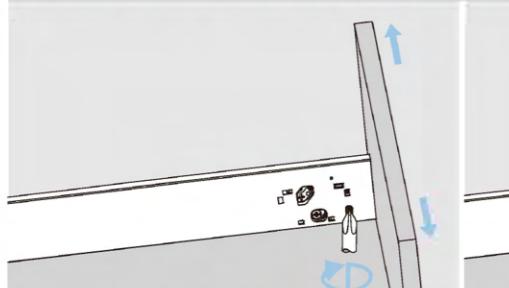


Left&right adjustment

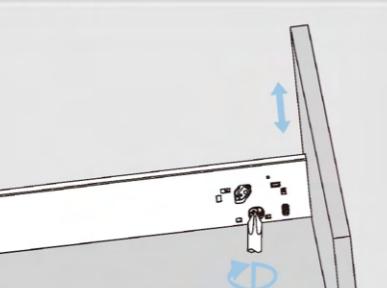


Up&down adjustment

Low Inner Drawer Front assembly (M Height)

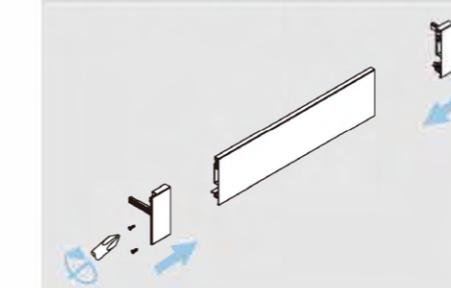


Clik


Removal for Lower/Medium Drawer(M/K Height)

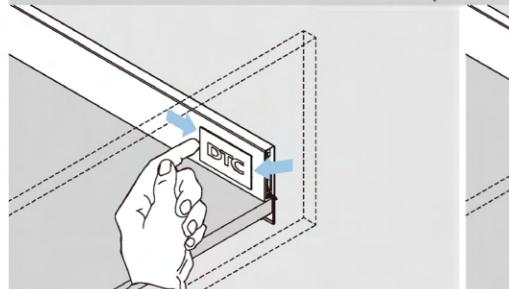

Tip up the cover and pull out


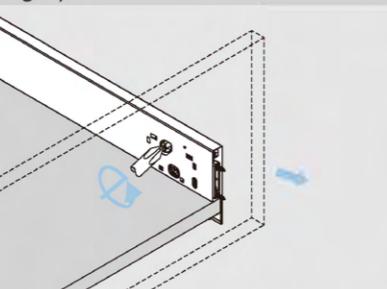


Turn screw driver to release the drawer front

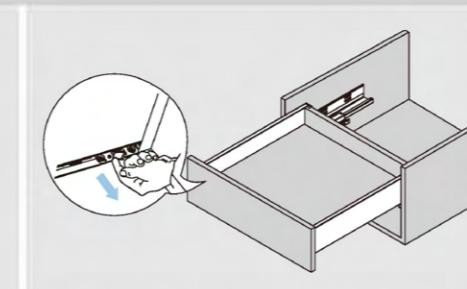

Press the locking device under drawer bottom and pull out the drawer

High Inner Drawer Front assembly (C Height)

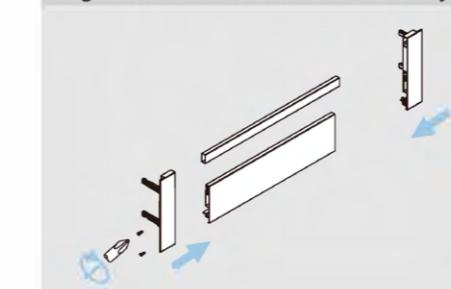

Clik