

INTEGRITY TESTING LABORATORIES



CLIENT:


Pride Industrial LLC
4653 Leston St, Suite 701
Dallas, TX 75247
Attention: Joseph Habbouch

LABORATORY NO: F2404151-1C1
DATE: May 22, 2024
CLIENT P.O. Email
STANDARDS: ANSI/BHMA 156.9-20
ANSI/KCMA A161.1-22,

**SAMPLE: ONE SELF CLOSE, SOFT CLOSE CABINET HINGE,
P/N EZ Snap ESF105D, tested with plates EFFCM3 and EES2**

ABSTRACT

This report serves to document the testing of the above sample to all applicable hinge test paragraphs of ANSI/BHMA A156.9-2020, American national standards for cabinet hardware, and ANSI/KCMA A161.1-2022, American national standards for kitchen and vanity cabinets. We were requested to exceed all performance requirements by **increasing the number of cycles to 75,000 cycles**. The remainder of this report will show how the hinge samples submitted for testing, **met the requirements needed for conformance** to these test standards.

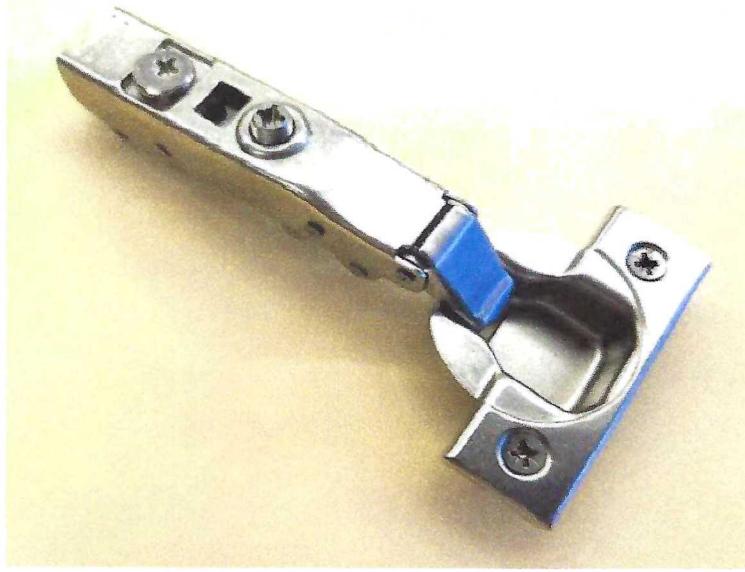

HINGE, P/N EZ Snap SF105FD

Integrity Testing, 3959 S.W. 12th Court, Ft. Lauderdale, FL 33312 - Phone: (714) 321-0191

This report applies only to the sample or samples submitted for testing and is not necessarily indicative of the quality or condition of apparently identical or similar products. Samples were submitted as received, directly by the client along with all descriptors, names, models, or ID, no sampling procedures were performed by these laboratories. Client provided samples can affect reported results. No external service providers were utilized for the reported determinations. As a mutual protection to clients, the public, or these laboratories, this report is submitted and accepted for the exclusive use of the client to whom it is addressed, and upon that condition that it not be used, in whole or in part, in any advertising or publicity matter without prior written authorization from these laboratories. Where statements of conformity are made in testing reports, the following decision rules are applied: **PASS** - Results within limits/specifications - **FAIL** - Results exceed limits/specifications. All laboratory procedures were performed in compliance with ISO/IEC 17025-2017.

OBSERVATIONS AND RESULTS**ANSI/BHMA A156.9-20-GRADE 2**

LABORATORY DETERMINATION	LABORATORY OBSERVATION	ANSI/BHMA A156.9-20 GRADE 2 REQUIREMENT	TEST RESULT
Hinge Permanent Set Test BHMA Section 4.2	Vertical Deflection = 0.036"	0.060" maximum vertical deflection after 75 lb. test load.	PASS
Hinge Operating Life Cycle Test BHMA Section 4.3	Vertical Deflection = 0.028" 75,000 cycles completed	0.030" maximum vertical deflection after 50,000 cycles with 12 lb. test load.	PASS
Hinge Self Closing Force Test BHMA Section 4.4.2	Closing Force = 12 oz.	4 oz. minimum closing force.	PASS
Hinge Self Closing Test BHMA Section 4.4.3	Door closed and remained closed from 10°.	Hinges shall close door from 10° after 50,000 cycles.	PASS
Hinge Over Opening Test BHMA Section 4.4.4	Door closed and remained closed from 10°.	Hinges shall close door from 10° after 17-lb. test force.	PASS


ANSI/KCMA A161.1-22

LABORATORY DETERMINATION	LABORATORY OBSERVATION	ANSI/KCMA A161.1-127 REQUIREMENT	TEST RESULT
Door Racking and Hinge Permanent Set Test Section 6.1	Vertical Deflection = 0.026"	0.065" maximum vertical deflection after 65 lb. test load.	PASS
Hinge Operating Life Cycle Test Section 6.2	Vertical Deflection = 0.020" 75,000 cycles completed	0.065" maximum vertical deflection after 25,000 cycles.	PASS

CONCLUSION

During the execution of the testing program, the model **EZ Snap ESF105D hinge with the listed mounting plates** performed well with no structural breakage or failure, including the increased cycle performance of 75,000 cycles.. This sample submitted for testing **met all of the hinge test requirements and conforms to ANSI/BHMA 156.9-2020 for Grade 2 products, and ANSI/KCMA A161.1-22.**

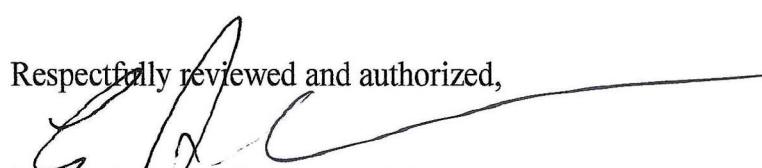

Respectfully reviewed and authorized,

Edwin A. Leach, Laboratory Manager
INTEGRITY TESTING LABORATORIES